




ORLEN
OIL

PRODUCT CATALOGUE FOR INDUSTRY

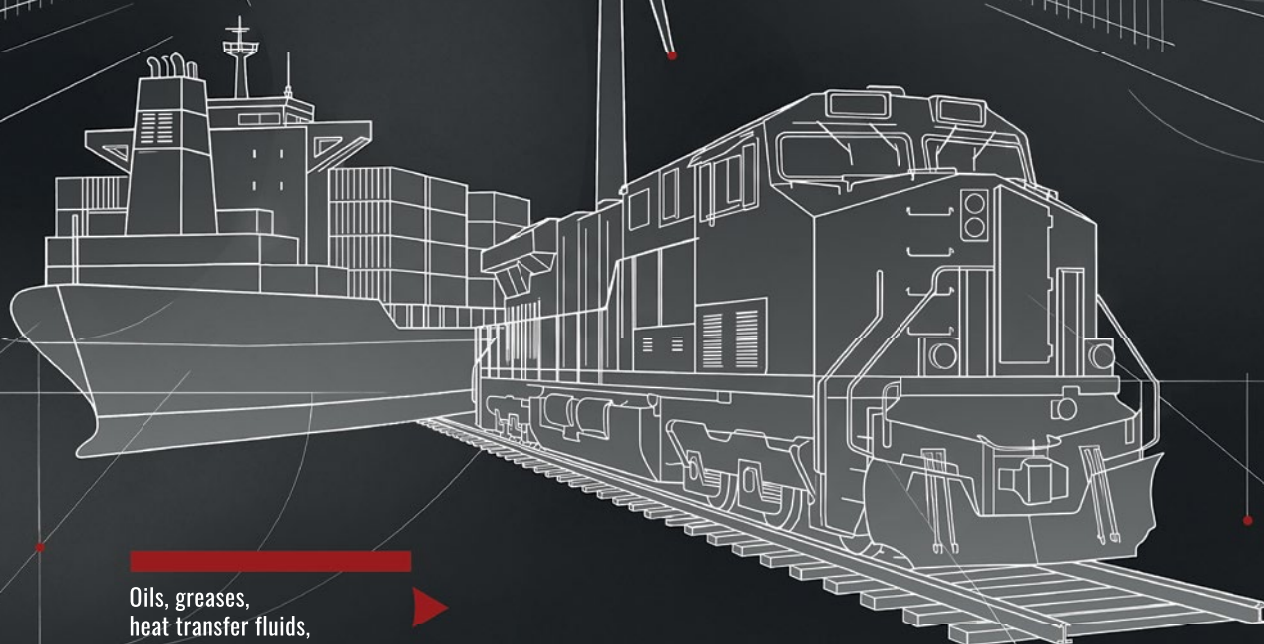

Oils, greases,
heat transfer fluids,
hydraulic liquids

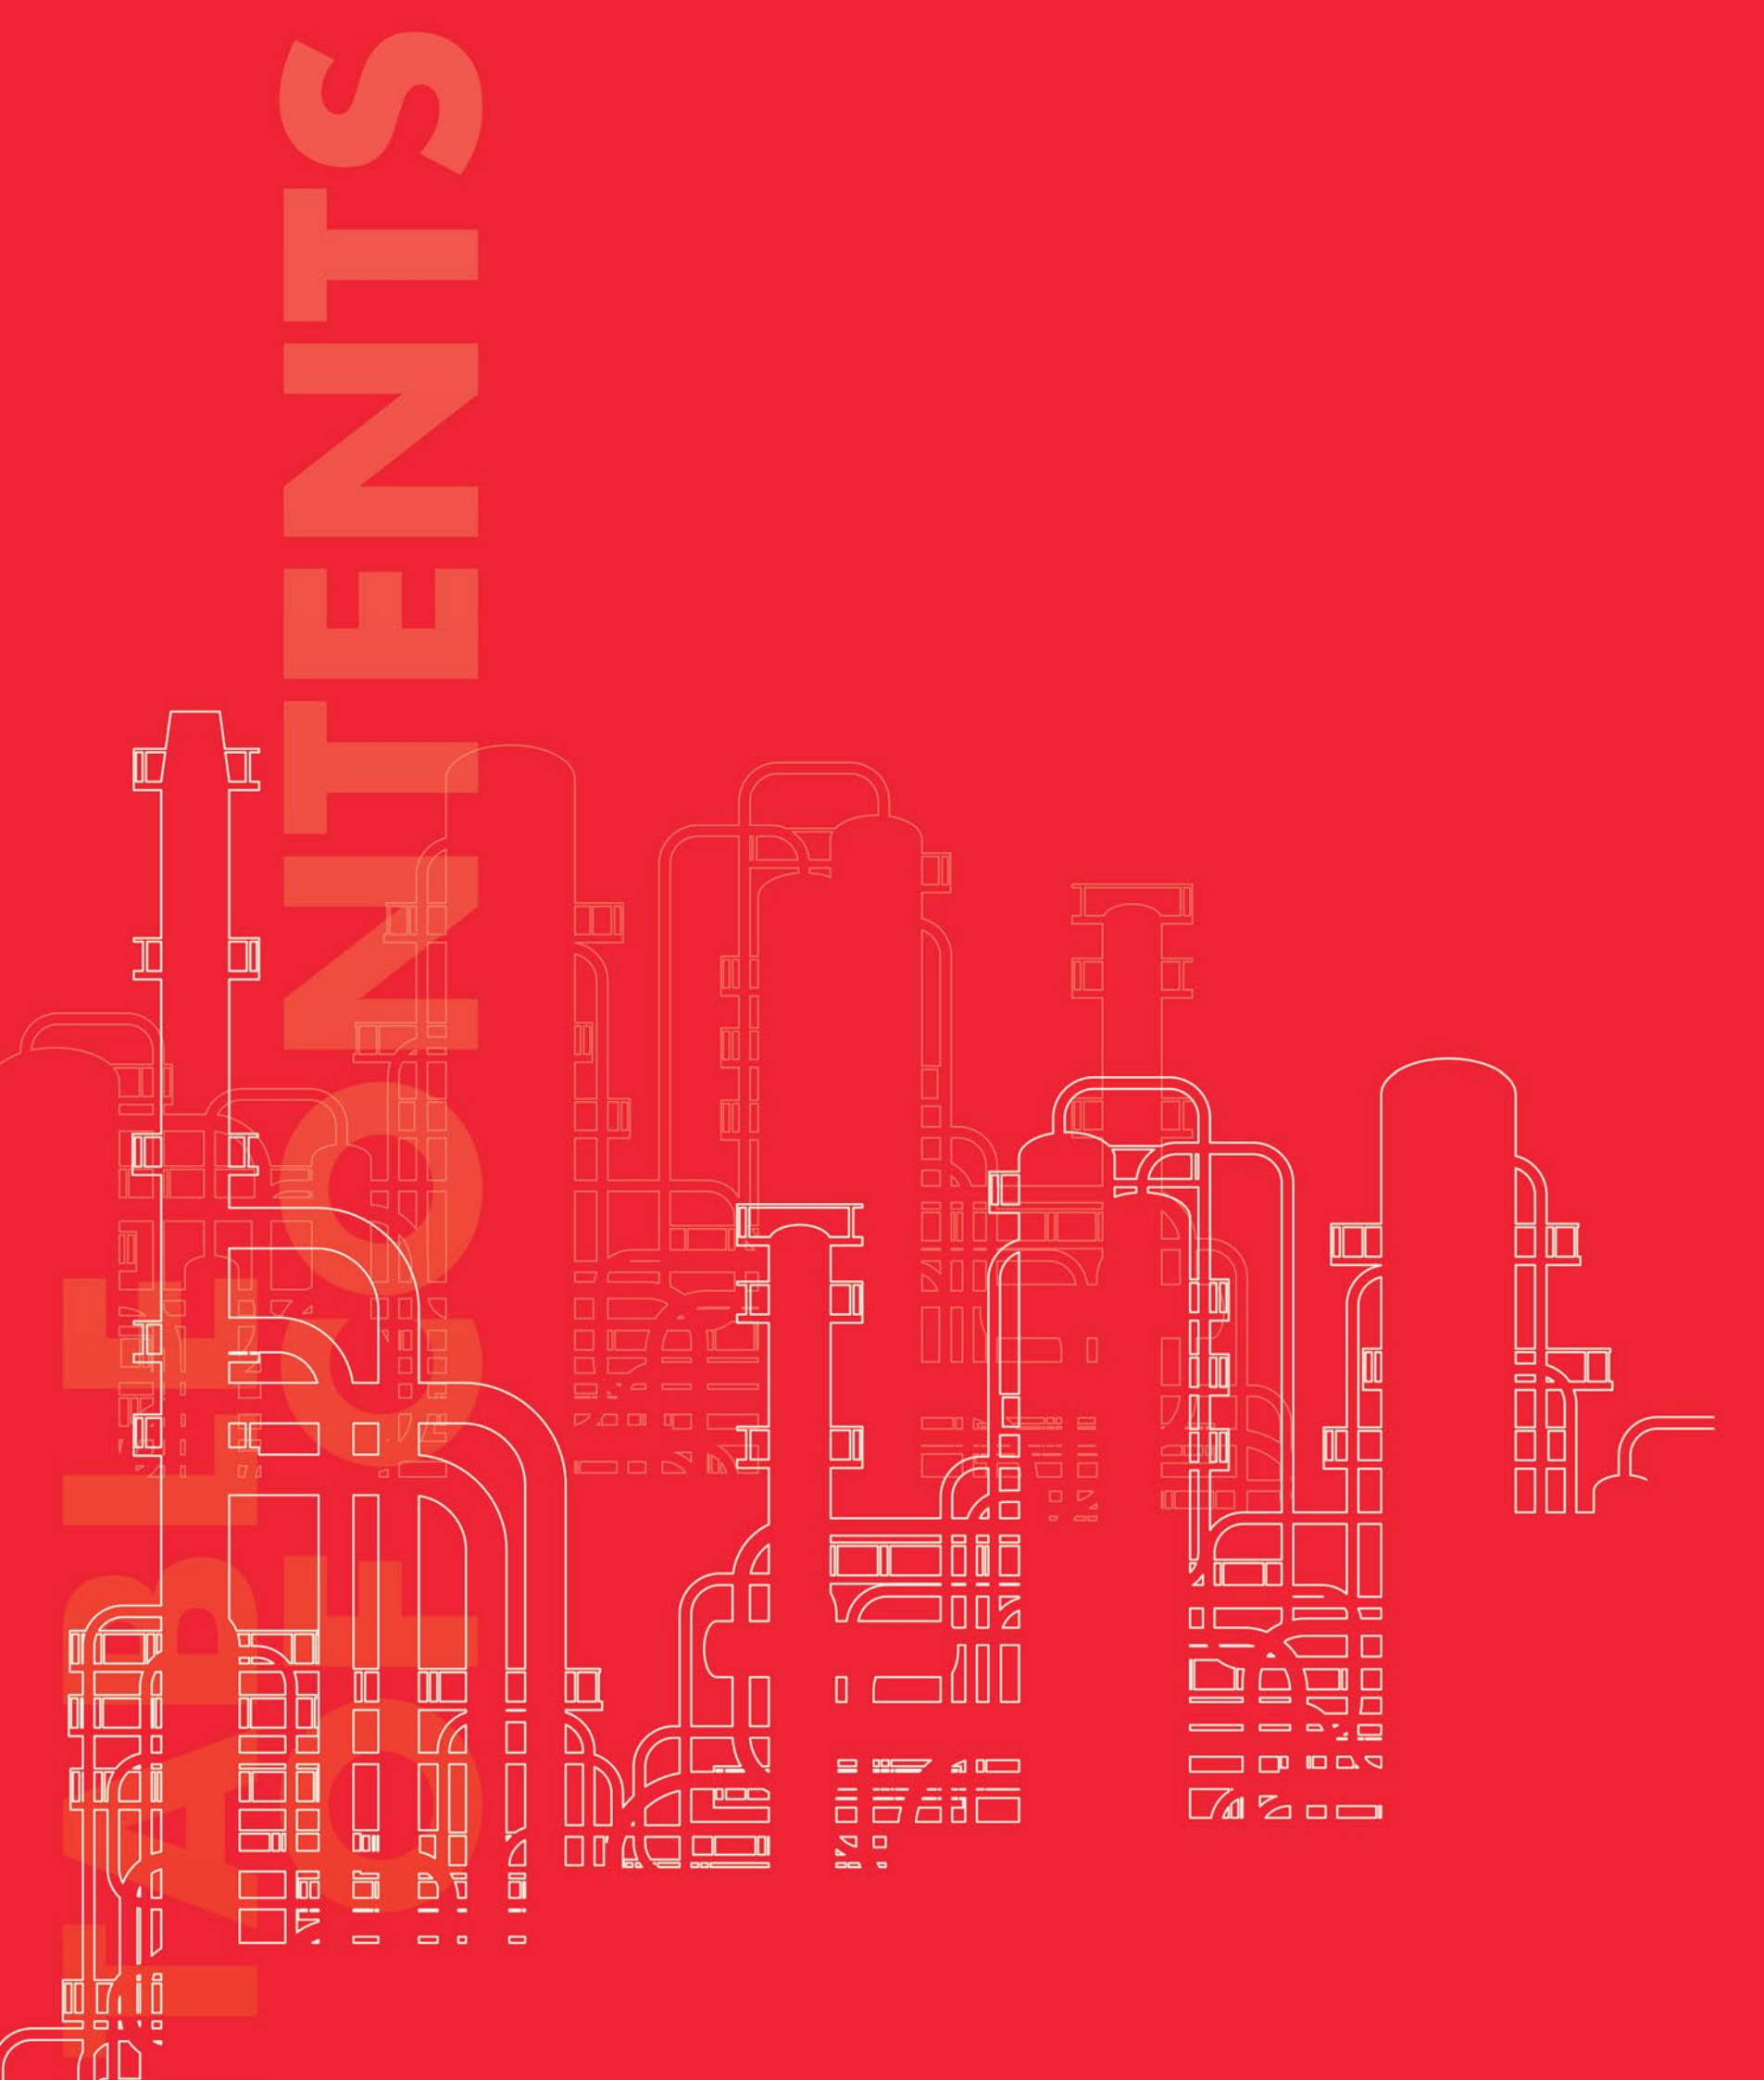


Table of Contents

4	Who We Are
8	Hydraulic Oils
15	Fire-Resistant Hydraulic Fluids
15	Hydraulic and Gear Oils
16	Gear Oils
20	Compressor Oils
22	Turbine Oils
24	Gas Engine Oils
26	Locomotive Oils
27	Marine Oils
28	Machine Oils
32	Process Oils
34	Release Oils
36	Emulsifiable Metalworking Oils
38	Non-Emulsifiable Metalworking Oils
42	Plastic Forming Oils
43	Maintance Oils
44	Quenching Oils
45	Heat Transfer Fluids
46	Saw Oils
46	Electrical Insulating Oils
47	Pneumatic Equipment Oils
47	Shock Absorber Oils
48	Greases
56	Other
58	Alphabetical Product Index

LEADER

We are a manufacturer of lubricants, highly regarded both at home and abroad. Our strength comes from many years of experience and our investment in modern technology. Our experienced team of 650 employees is fully committed to ensuring the quality and reliability of our products and to the company’s consistent growth. Together, we work continuously to improve our know-how.

BRAND

ORLEN OIL is part of the ORLEN Group of Companies. ORLEN S.A. is the largest integrated multi-energy group in Central Europe, operating the most extensive network of fuel stations in the CEE region, developing modern petrochemicals and energy through the expansion of low-emission energy sources. ORLEN offers solutions that meet the contemporary needs of customers and the economy. The energy of tomorrow starts today!

We supply fuels to the Central and Eastern European markets.

 **38,2** [mln t]
] of crude oil processed
across 7 refineries

 **~3500**
retail outlets in Poland, Germany, the Czech Republic,
Austria, Slovakia, Lithuania, and Hungary

We supply natural gas to the Polish economy.

 **~20** [billion m³]
of natural gas delivered
to Central European markets

 **9,1** [billion m³]
of natural gas produced in Poland,
Norway, Canada, and Pakistan

We are a major producer of electricity in Poland.

 **16,9** [TWh]
of electricity produced annually
– the third largest producer in Poland

 **1,3** [GW]
of currently installed renewable energy
capacity onshore

We provide services to consumers in 7 countries

 **4** [product groups]
fuel retail, non-fuel retail,
energy, and gas

 **5** [million]
number of VITAY users

ORLEN
OIL

Who are we?



EFFICIENCY

We operate 4 production plants, including a modern logistics centre in Trzebinia. We have access to marine logistics facilities in Gdańsk, a waste oil processing installation, and a lubricant production line in Jedlicze. Production and logistics efficiency in domestic and international markets is our priority.

PRODUCTION

We have an annual production capacity of 510,000 tonnes of finished products, manufactured from base oils sourced from our own state-of-the-art refineries in Central and Eastern Europe: the Gdańsk Refinery and the ORLEN Refinery in Płock. Working with ORLEN OIL guarantees supply reliability, consistent production batches and the use of technologically advanced additives. The quality of ORLEN OIL products is confirmed not only by approvals, but also by the Company's membership of ATIEL.

DISTRIBUTION

4 continents, more than 60 countries and over 200 distributors – these figures illustrate ORLEN OIL's commercial reach on the global market. Our products are valued both in the heat of Africa and in the cold climates of the Arctic Circle. Each country we serve can find dedicated products in our portfolio, tailored to the specific needs of its automotive markets.

INVESTMENTS

As the ORLEN Group, we are building a modern hydrocracking base oil unit to better meet the growing demand for lubricants in global markets. Thanks to proven Chevron Lummus Global technology, we will soon be producing our own Group II base oils – Amber Base.

ORLEN OIL

Who are we?

4
CONTINENTS

60+
COUNTRIES

200+
DISTRIBUTORS



Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point [°C], COC	Corrosive effect on Cu plate, 100°C/3h	Quality class	Approvals	Product description
HYDROL BIO HEES EL 46	919,8	47,0	191	-48	300	1	PN-ISO 15380	-	A hydraulic oil based on specially selected synthetic esters, characterised by a biodegradability of 80.35%, determined according to the PN-EN ISO 14593 standard under laboratory test conditions. This product is intended for use in industrial and mobile hydrostatic hydraulic systems, particularly in applications where there is an increased risk of accidental oil release into the environment. This product is not intended to be deliberately released into the environment. Any spills must be cleaned up according to the relevant regulations.
HYDROL BIO HETG EL 46	917,7	47,7	207	-23	306			-	A hydraulic oil based on a selected vegetable oil, characterised by a high level of biodegradability – 97.27%, determined according to PN-EN ISO 14593 under laboratory test conditions. This product is intended for use in industrial and mobile hydrostatic hydraulic systems, particularly in applications where there is an increased risk of accidental oil release into the environment. This product is not intended to be deliberately released into the environment. Spills must be cleaned up according to the relevant regulations.
HYDROL HEAVY L-HV/HVLP 15	857,0	15,0	155	-42	189	1a	DIN 51524-3 HVLP ISO 6743-4 HV ISO 11158 HV	Complies with: · Bosch-Rexroth RDE 90235 · Parker Denison HF0, HF1, HF2 · Danfoss 03-401-2010 · Danfoss EFDGN-TB002-E · Fives Cincinnati P-68, 69, 70	Modern hydraulic oils recommended for heavily loaded power transmission and hydraulic drive and control systems. Used in mobile hydraulic systems (operating under variable temperature conditions) of excavators, bulldozers, lifts, mining equipment, as well as in industrial systems and equipment (including in the marine industry).
HYDROL HEAVY L-HV/HVLP 32	868,8	32,4	167	-48	215				
HYDROL HEAVY L-HV/HVLP 46	877,8	46,0	157	-42	226				
HYDROL HEAVY L-HV/HVLP 68	878,0	66,2	157	-39	221				
HYDROL HEAVY L-HV/HVLP 100	880,0	100,0	150	-39	246				
HYDROL POWER L-HV 32 *	855,9	32,2	186	-39	-	1a	DIN 51524-3 HVLP ISO 6743-4 HV ISO 11158 HV	Holds: · GIG Certificate, Mark B Complies with: · Parker Denison HF0, HF1, HF2 · Danfoss 03-401-2010 · Danfoss EFDGN-TB002-E · Fives Cincinnati P-68, 69, 70	Hydraulic oils with an increased viscosity index, intended for lubrication of hydraulic systems in mobile construction machinery, mining machinery, and stationary industrial equipment. The DYNAVIS® technology by EVONIK allows for reduced fuel consumption and lower energy use.
HYDROL POWER L-HV 46	866,8	48,6	180	-39					
HYDROL POWER L-HV 68 *	871,5	68,4	180	-36					
HYDROL L-HV PLUS 32 *	862,2	31,2	180	-45	199	1a	DIN 51524-3 HVLP ISO 6743-4 HV ISO 11158 HV	Complies with: · Parker Denison HF0, HF1, HF2 · Danfoss 03-401-2010 · Danfoss EFDGN-TB002-E · Fives Cincinnati P-68, 69, 70	Mineral zinc-based oils with an increased viscosity index. They contain carefully selected additives providing lubricating, anti-corrosion, antioxidant, demulsifying and anti-foam properties. Designed for heavily loaded power transmission and hydraulic drive and control systems in the hydraulic circuits of construction and mining machinery.
HYDROL L-HV PLUS 46	872,5	46,9	180	-45	205				
HYDROL L-HV PLUS 68	877,2	66,2	178	-45	217				
HYDROL SYNT PE 46 *	839,0	43,7	140	-54	258	1a	DIN 51524-3 HVLP ISO 6743-4 HV ISO 11158 HV	-	Synthetic, zinc-free and ash-free hydraulic oil based on polyalphaolefins (PAO). Recommended for use in heavily loaded power transmission and hydraulic drive and control systems operating under very demanding conditions, with high ambient temperatures and humidity.
HYDROL EXTRA L-HV 32	853,9	32,0	158	-42	-	1a	DIN 51524-3 HVLP ISO 6743-4 HV ISO 11158 HV	Holds: · GIG Certificate, Mark B · Danfoss 03-401-2010 Complies with: · Parker Denison HF0, HF1, HF2 · Danfoss EFDGN-TB002-E · Danfoss 03-401-2010	Hydraulic oils with a high viscosity index and excellent shear stability. Primarily intended for lubrication of hydraulic systems in mobile construction and mining machinery operating under very demanding conditions (hydraulic pump operating pressures up to 50 MPa), with variable temperatures and humidity.
HYDROL EXTRA L-HV 46	878,4	47,0	157	-39					
HYDROL EXTRA L-HV 68	884,4	68,6	155	-36					
HYDROL ARCTIC L-HV 15 *	874,4	15,9	330	-63	136	1a	DIN 51524-3 HVLP ISO 6743-4 HV ISO 11158 HV	-	Hydraulic oils with excellent low-temperature properties and a very high viscosity index. Designed for use in hydraulic systems operating in extremely low ambient temperatures.
HYDROL ARCTIC L-HV 32	866,0	32,2	263	-56	164				
HYDROL PREMIUM L-HV 15 *	845,6	16,3	153	-39	191	1a	DIN 51524-3 HVLP ISO 6743-4 HV ISO 11158 HV	Complies with: · Parker Denison HF0, HF1, HF2 · Danfoss 03-401-2010 · Danfoss EFDGN-TB002-E	Zinc-free hydraulic oils designed for heavily loaded power transmission and hydraulic drive and control systems operating under extremely demanding conditions of high pressure and across a wide temperature range.
HYDROL PREMIUM L-HV 22 *	861,7	21,7	152	-37	195				
HYDROL PREMIUM L-HV 32	867,3	31,6	165	-39	203				
HYDROL PREMIUM L-HV 46	875,6	45,9	148	-34	210				
HYDROL PREMIUM L-HV 68	880,5	65,9	146	-30	221				
HYDROL L-HV 15	856,6	16,0	198	-40	178	1a	DIN 51524-3 HVLP ISO 6743-4 HV ISO 11158 HV	Holds: · GIG Certificate, Mark B Complies with: · Parker Denison HF0, HF1, HF2 · Danfoss 03-401-2010 · Danfoss EFDGN-TB002-E · Fives Cincinnati P-68, 69, 70	Hydraulic oils intended for use in heavily loaded drive systems, high-pressure fixed and variable displacement piston pumps, and in precision hydraulic control systems and hydraulic installations. These oils are characterised by a high level of anti-wear properties and significantly improved viscosity-temperature characteristics compared to L-HM type hydraulic oils.
HYDROL L-HV 22	862,6	22,2	169	-39	192				
HYDROL L-HV 32	868,2	30,8	155	-35	205				
HYDROL L-HV 46	875,9	44,8	154	-42	209				
HYDROL L-HV 68	880,3	65,0	148	-30	223				
HYDROL L-HV 100	884,3	91,6	148	-30	232				

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order

PREMIUM – zinc-free oils
PAO – polyalphaolefins
COMPLIES WITH – complies with the approval requirements
HOLDS – holds approval or certificate



Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point [°C], COC	Corrosive effect on Cu plate, 100°C/3h	Quality class	Approvals	Product description
HYDROL EXTRA HLP-D 32 *	869,0	31,9	99	-35	216	1a	DIN 51524-2 HLPD ISO 6743-4 HM ISO 11158 HM	-	High-quality, zinc-free hydraulic oil with detergent properties. The product is intended for use in stationary and mobile hydraulic systems operating under variable operating conditions, high pressure, and high thermal loads. The oil is especially dedicated for continuous operation systems and for applications where there is a risk of system contamination with water or condensed steam.
HYDROL PREMIUM HLP-D 15 *	857,7	14,4	109	-30	170	1	DIN 51524-2 HLPD ISO 6743-4 HM ISO 11158 HM	-	High-quality, zinc-free hydraulic oil with detergent properties. The product is intended for use in stationary and mobile hydraulic systems operating under variable operating conditions, high pressure, and high thermal loads. The oil is especially dedicated for continuous operation systems and for applications where there is a risk of system contamination with water or condensed steam.
HYDROL PREMIUM HLP-D 32	874,1	31,1	98	-34	215				
HYDROL PREMIUM HLP-D 46	879,5	45,9	98	-27	225				
HYDROL PREMIUM HLP-D 68	883,5	68,3	96	-25	230				
HYDROL HLP-D 22	867,1	22,1	106	-33	217	1	DIN 51524-2 HLPD ISO 6743-4 HM ISO 11158 HM	-	Hydraulic oils with detergent properties, intended for use in various types of stationary and mobile hydraulic systems of machinery and equipment operating under normal and severe working conditions, particularly in continuous operation systems and where there is a risk of system contamination with water or condensed steam.
HYDROL HLP-D 32	873,8	30,9	104	-33	210				
HYDROL HLP-D 46	880,7	45,7	102	-30	225				
HYDROL HLP-D 68	886,2	67,6	99	-30	232				
HYDROL HEAVY L-HM/HLP 15	852,3	14,6	111	-30	170	1a	DIN 51524-2 HLP ISO 6743-4 HM ISO 11158 HM	Holds: · Schuler - Müller Weingarten DT55005 Complies with: · Bosch-Rexroth RDE 90235 · Parker Denison HF0, HF1, HF2 · Danfoss 03-401-2010 · Fives Cincinnati P-68, 69, 70 Holds: · Bosch-Rexroth RDE 90235 · Parker Denison HF0, HF1, HF2 · Danfoss 03-401-2010 · Danfoss EFDGN-TB002-E Complies with: · Fives Cincinnati P-68, 69, 70 · GM LS-2 Antiwear Hydraulic Oil · Chinese Standard GB 11118.1 L-HM · JCMAS HK · U.S. Steel 126 Complies with: · Bosch-Rexroth RDE 90235 · Parker Denison HF0, HF1, HF2 · Danfoss 03-401-2010 · Fives Cincinnati P-68, 69, 70	Modern hydraulic oils developed in cooperation with leading manufacturers of hydraulic systems and components, including BOSCH-REXROTH, PARKER DENISON, EATON. These oils are recommended for heavily loaded power transmission and hydraulic drive and control systems. Used in mobile hydraulic systems (operating under variable temperature conditions) of excavators, bulldozers, lifts, mining equipment, as well as in industrial systems and equipment (including in the marine industry).
HYDROL HEAVY L-HM/HLP 22	867,1	22,4	101	-33	210				
HYDROL HEAVY L-HM/HLP 32	875,4	32,8	105	-33	228				
HYDROL HEAVY L-HM/HLP 46	880,3	46,3	105	-30	230				
HYDROL HEAVY L-HM/HLP 68	886,0	68,1	100	-30	248				
HYDROL HEAVY L-HM/HLP 100 *	891,5	101,1	99	-30	250				
HYDROL HEAVY L-HM/HLP 150 *	894,3	154,6	100	-30	268				
HYDROL PREMIUM L-HM 22	864,3	22,5	102	-34	194				
HYDROL PREMIUM L-HM 32	874,4	31,8	102	-28	210	1a	DIN 51524-2 HLP ISO 6743-4 HM ISO 11158 HM	-	Zinc-free hydraulic oils designed for use in heavily loaded power transmission and hydraulic drive and control systems operating under extremely demanding conditions of high pressures and high temperatures.
HYDROL PREMIUM L-HM 46	879,0	45,6	102	-27	212				
HYDROL PREMIUM L-HM 68	884,2	65,0	102	-26	224				
HYDROL PREMIUM L-HM 150	893,9	147,6	95	-27	290				
HYDROL L-HM/HLP 10	853,9	10,1	101	-36	162	1a	DIN 51524-2 HLP ISO 6743-4 HM ISO 11158 HM	Complies with: · Parker Denison HF0, HF1, HF2 · Danfoss 03-401-2010 · Danfoss EFDGN-TB002-E · Fives Cincinnati P-68, 69, 70 Holds: · GIG Certificate, Mark B Complies with: · Parker Denison HF0, HF1, HF2 · Danfoss 03-401-2010 · Danfoss EFDGN-TB002-E · Fives Cincinnati P-68, 69, 70 Holds: · Parker Denison HF0, HF1, HF2 · GIG Certificate, Mark B Complies with: · Danfoss 03-401-2010 · Danfoss EFDGN-TB002-E · Fives Cincinnati P-68, 69, 70 Complies with: · Parker Denison HF0, HF1, HF2 · Danfoss 03-401-2010 · Danfoss EFDGN-TB002-E · Fives Cincinnati P-68, 69, 70 · GIG Certificate, Mark B	Hydraulic oils intended for use in heavily loaded power transmission and hydraulic drive and control systems, such as hydraulic gearboxes, regulating and control mechanisms, and other similar equipment, operating under difficult conditions with elevated temperatures and humidity.
HYDROL L-HM/HLP 15	860,8	15,1	102	-35	180				
HYDROL L-HM/HLP 22	865,3	21,9	102	-35	195				
HYDROL L-HM/HLP 32	873,5	30,4	103	-30	211				
HYDROL L-HM/HLP 46	879,5	45,3	104	-30	227				
HYDROL L-HM/HLP 68	885,6	66,8	100	-27	237				
HYDROL L-HM/HLP 100	878,7	98,3	99	-23	273				
HYDROL L-HM/HLP 150	883,2	143,2	96	-18	282				

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order

PREMIUM – zinc-free oils
COMPLIES WITH – complies with the approval requirements **HOLDS** – holds approval or certificate

Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point [°C], COC	Corrosive effect on Cu plate, 100°C/3h	Quality class		Approvals	Product description
HYDROL L-HL 15	858,4	14,4	100	-35	180	1a	DIN 51524-1 HL ISO 6743-4 HL ISO 11158 HL		-	Hydraulic oils intended for use in low and medium loaded power transmission and hydraulic drive and control systems of hydro-statically driven equipment operating under moderate temperature conditions.
HYDROL L-HL 22	866,6	21,9	103	-33	197					
HYDROL L-HL 32	874,1	31,0	103	-30	218					
HYDROL L-HL 46	880,1	45,5	101	-28	224					
HYDROL L-HL 68	884,8	66,4	98	-27	230					
HYDROL L-HL 100	879,7	101,3	95	-19	264					
HYDROL L-HL 150	885,2	149,1	96	-16	277					
ORLEN OIL H-515	869,9	13,1	390	-63	93	1 (135°C/72h)	NO-91-A202:2019 STANAG 3748:2015 MIL-PRF-5606J	-	Hydraulic oil for aviation and ground equipment. The product is intended for use in hydraulic systems, shock absorber assem- blies, and hydraulic dampers of aircraft, as well as in the hydraulic systems of ground equipment.	
HYDROL PREMIUM HVLP-D 46 *	877,5	47,4	177	-42	230	1	DIN 51524-3 HVLPD ISO 6743-4 HV ISO 11158 HV	-	Zinc-free hydraulic oil with detergent properties and a high viscosity index. Intended for stationary and mobile hydraulic sys- tems of machinery and equipment operating under normal and severe conditions where there is a risk of system contamination with water or condensed steam. It can be used in construction machinery operating in high air pollution.	
HYDROL HVLP-D 46	874,5	46,3	157	-39	230	1	DIN 51524-3 HVLPD ISO 6743-4 HV ISO 11158 HV	-	Hydraulic oil with detergent properties and a high viscosity index. Intended for stationary and mobile hydraulic systems of ma- chinery and equipment operating under normal and severe conditions where there is a risk of system contamination with water or condensed steam. It can be used in construction machinery operating in high air pollution.	
HYDROL HLPT 46	877,5	42,7	123	-39	220	1	DIN 51524-2 HLP ISO 6743-4 HM ISO 11158 HM	-	Hydraulic oil intended for use in heavily loaded power transmission and hydraulic drive and control systems, such as hydraulic gearboxes, regulating and control mechanisms, and other similar equipment, operating under difficult conditions with elevated temperatures and humidity. The product features enhanced physico-chemical properties.	
HYDROL SPECIAL 46 *	875,6	48,8	123	-39	220	1	DIN 51524-2 HLP ISO 6743-4 HM ISO 11158 HM	-	Hydraulic oils with enhanced oxidation resistance. Intended for lubrication of power transmission systems, hydraulic drive and control systems of regulating and control mechanisms, and hydraulic gearboxes. These products are designed for use in sta- tionary and mobile industrial machinery, vehicles, construction machinery, and mining equipment.	
HYDROL SPECIAL 68 *	883,8	69,3	115	-42	225					
O.OIL OTHP3 ISO VG 32	872,0	30,9	122	-42	202	1	DIN 51524-2 HLP ISO 6743-4 HM ISO 11158 HM	Complies with: · Parker Denison HF0, HF1, HF2	Mineral hydraulic oil intended for stationary and mobile machinery, buses, forklifts, trucks, and construction machinery with automatic transmissions. It may also be used as an HM-type hydraulic fluid.	

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order



Table Viscosity classification of industrial oils according to ISO 3448	
ISO 3448 Viscosity Grade	Permissible range of kinematic viscosity at 40°C for the given oil grade [mm²/s]
2	1,98 - 2,42
3	2,88 - 3,52
5	4,14 - 5,06
7	6,12 - 7,48
10	9,00 - 11,0
15	13,5 - 16,5
22	19,8 - 24,2
32	28,8 - 35,2
46	41,4 - 50,6
68	61,2 - 74,8
100	90 - 110
150	135 - 165
220	198 - 242
320	288 - 352
460	414 - 506
680	612 - 748
1000	900 - 1100
1500	1350 - 1650

Table Classification of industrial oils according to ISO and DIN			
ISO 6743/4	DIN 51 524	Composition	Application
HL	HL	Mineral oils with improved anti-corrosion and antioxidant properties	Hydraulic oils intended for use in low and medium loaded power transmission and hydraulic drive and control systems of hydrostatically driven equipment operating under moderate temperature conditions.
HM	HLP	HL oils with improved anti-wear properties	Hydraulic oils intended for use in heavily loaded power transmission and hydraulic drive and control systems, such as hydraulic gearboxes, regulating and control mechanisms, and other similar equipment, operating under difficult conditions with elevated temperatures and humidity.
-	HLPD	Mineral oils with anti-wear, antioxidant and anti-corrosion additives. They contain detergent-dispersant additives.	For use in various types of stationary and mobile hydraulic systems of machinery and equipment operating under normal and severe working conditions, where there is a risk of system contamination with water or condensed steam.
HV	HVLP	HM oils with improved viscosity-temperature properties	Hydraulic oils intended for use in heavily loaded drive systems, high-pressure fixed and variable displacement piston pumps, and in precision hydraulic control systems and hydraulic installations.
HEES	-	Synthetic esters	Hydrostatic hydraulic systems, for applications requiring the use of environmentally friendly fluids.
HETG	-	Triglycerides	



Product name	Kinematic viscosity at 40°C [mm²/s]	Water content by distillation	Emulsion pH	Certificate	Product description
HYDROKOP SEMISYNTETIC	52,0	60	od 8 do 10	Holds: · GIG Certificate, Mark B	Microemulsion concentrate for the preparation of micro-emulsions at a concentration of 0.5 – 2 % (m/m), used in mining as a fire-resistant hydraulic fluid HFAE with water of total hardness up to 750 mg CaCO ₃ /l (42 °n).
Product name	Kinematic viscosity at 40°C [mm²/s]	Viscosity indexes	pH	Corrosive effect on copper (24h/50°C)	Product description
HYDRAFER HFC 46	41,8	221	9,80	1	Fire-resistant hydraulic fluid used to power the hydraulic systems of machines and equipment. Produced based on glycol, a special package of performance additives, and demineralised water. The product is intended for use in hydraulic systems of machines and equipment operating in particularly hazardous conditions, such as in mining, coke production, metallurgy, and metalworking industries, for example, in die casting machines, hydraulic forging presses, roadheaders, shearer loaders, conveyors, and in other industrial sectors. The maximum operating temperature of the fluid is approx. 60°C.
Product name	Density at 20°C [g/ml]	Crystallisation temperature, max. [°C]	Boiling point [°C]	Certificate	Product description
KONHYDR T	1,076	-35	107	Holds: · GIG Certificate, Mark B	Product intended for transport and temporary corrosion protection of hydraulic power equipment components made of steel, copper, zinc, brass, and aluminium. The fluid may also be used as a working medium in cooling systems and as a liquid for spraying floors and wagon sides during winter to prevent freezing and clumping of coal.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

HOLDS – holds approval or certificate



Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point [°C]	Resistance to foaming, I sequence [ml/ml]	Quality class	Approval / certificate	Product description
GALKOP 46	882,3	46,8	100	-26	221	0/0	DIN 51517-3 CLP DIN 51524-3 HLP	Holds: · GIG Certificate, Mark B	Hydraulic and gear oils recommended for lubrication of hydraulic systems and mechanical gearboxes in the mining industry and in industrial machinery.
GALKOP 68	887,6	70,6	100	-25	241				
GALKOP 100	889,2	98,6	97	-24	257				
GALKOP 150 *	892,9	151,7	95	-18	260				
TRANSOL V 32	869,5	32,3	107	-36	218	20/0	DIN 51517-3 CLP DIN 51524-2 HLP	Holds: · Voith Turbo 3625-006058 · Voith Turbo 3625-006072 · Voith Turbo 3625-006073 · Voith Turbo 3625-008426	Hydraulic and gear oil for industrial stationary couplings and hydrodynamic gearboxes of machines operating in heavy-duty conditions.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order

HOLDS – holds approval or certificate

Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point [°C]	Corrosive effect on Cu plate, 100°C/3h	FZG	Quality class	Approval / certificate	Product description
TRANSGEAR PAG 150	998,7	152,8	201	-30	>260	1	>13	DIN 51517-3 CLP	Complies with: David Brown Typ G	Synthetic industrial gear oils based on polyalkylene glycols (PAG). These oils are intended for heavily loaded mechanical gearboxes of industrial equipment operating at temperatures exceeding 200°C.
TRANSGEAR PAG 220	100,9	217,7	174	-30						
TRANSGEAR PAG 320	100,8	329,2	198	-30						
TRANSGEAR PAG 460 *	100,6	480,7	225	-28						
TRANSGEAR EXTRA PAG 220	1059,0	226,0	233	-39	290	-	-	DIN 51517-3 CLP ISO 12925-1 CSPG, CTPG	Complies with: - Flender gear units - David Brown Typ G	Synthetic industrial gear oil based on polyalkylene glycols (PAG). Designed for heavily loaded mechanical gearboxes of industrial equipment operating at temperatures exceeding 200°C.
TRANSGEAR EXTRA PAO 150	852,0	150,0	177	-48	245	1	>12	DIN 51517-3 CLP ISO 12925-1 CKD/CKSMP GB 5903-211 CKD AGMA 9005 F16 AS	Holds: Flender gear units	Oils based on modern synthetic metallocene polyalphaolefins (mPAO) and ashless additives. They can be used for lubrication of calenders, various types of gearboxes, and bearings operating under extreme thermal and mechanical loads. In enclosed industrial gearboxes, the properties of these oils enable very long service life – even up to “Fill for Life” operation.
TRANSGEAR EXTRA PAO 220	858,0	220,0	182	-42	245					
TRANSGEAR EXTRA PAO 320	860,0	320,0	186	-33	251					
TRANSGEAR EXTRA PAO 460	858,0	460,0	166	-30	245					
TRANSGEAR PAO 150	852,9	140,4	168	-51	258	1	>12	DIN 51517-3 CLP ISO 6743-6 CKD/CKS/CKT ISO 12925-1 CKD/CKS/CKT AGMA 9005-EO2 U.S. Steel 224	Complies with: David Brown Typ E	Synthetic industrial gear oils based on polyalphaolefins (PAO) and esters. These products are designed for various types of heavily loaded geared transmissions in industrial machinery and equipment, exposed to micropitting and operating at temperatures up to 180°C.
TRANSGEAR PAO 220	881,3	206,5	163	-39	236					
TRANSGEAR PAO 320	858,0	326,0	176	-45	274					
TRANSGEAR PAO 460 *	863,3	439,0	162	-39	260					
NEW AEROMIL SYNTHETIC PAO 320	856,4	323,0	192	-51	236	1b	>14	DIN 51517-3 CLP ISO 12925-1 CKD ISO 12925-1 CKSMP	Complies with: - GB/T 33540.3-2017 - ANSI/AGMA 9005-F16 - U.S. Steel 224 - Flender Rev. 16.2 - Winergy Rev. 8 - ZF Wind Power - Timken tests - SKF tests - FAG FE8 (4-step test) - VDMA 24570	A gear oil formulated using the latest-generation of fully synthetic base oil and dedicated performance additives, which provide excellent protection against corrosion, high load-carrying capacity and protection against micro-pitting. This product is designed for use in spur, bevel and planetary (epicyclic) gearboxes, as well as in gearboxes subjected to high loads, such as the main gearboxes of wind turbines. It is also suitable for lubricating oil-lubricated ball/roller bearings in modern wind turbine gearboxes, both onshore and offshore.
AEROMIL SYNTHETIC CLP 320	893,0	320,0	165	-36	225	1	14	DIN 51517-3 CLP AGMA 9005 E06	Holds: - Flender gear units Complies with: - Hansen - Winenergy - Moventas - FAG Schaffler - SKF PA Cage Compatibility Test - SKF Yellow Metal Compatibility - Timken OK Load	Top-quality oil dedicated to wind turbine gearboxes. Its unique formulation provides exceptional protection against sludge formation and deposit build-up, helping the system stay cleaner for longer and extending filter life. Additional benefits include a high degree of resistance to micropitting, high viscosity index, improved demulsification properties, efficient air release, and compatibility with sealing materials.
TRANSGEAR PE-150 *	876,1	147,8	160	-39	240	1	>12	DIN 51517-3 CLP ISO 12925-1 CKD ANSI/AGMA 9005-F16 U.S. Steel 224	Holds: - Flender gear units - GIG Certificate, Mark B	Synthetic industrial gear oils. Designed for various types of heavily loaded geared transmissions in industrial machinery and equipment, exposed to micropitting and operating at temperatures up to 180°C.
TRANSGEAR PE-220	883,9	216,3	163	-39	232					
TRANSGEAR PE-320	891,7	318,2	169	-39	238					
TRANSGEAR PE-460 *	898,1	449,2	166	-36	238					
TRANSOL EXTRA XSP 150 *	888,0	150,0	95	-18	260	1	>12	DIN 51517-3 CLP ISO 6743-6 CKD U.S. Steel 224 AGMA 9005 D 97	Holds: - Flender gear units Complies with: - David Brown	Top-quality mineral gear oils used in industrial gearboxes: bevel, angular, spur, planetary, worm, and geared motors, where the use of an oil with enhanced load-carrying film strength is required to ensure protection against micropitting. Thanks to their good thermo-oxidative stability, these products provide extended service intervals at elevated temperatures (up to 120°C) in modern industrial gearboxes.
TRANSOL EXTRA XSP 220	890,0	224,0	96	-18	260					
TRANSOL EXTRA XSP 320	898,0	317,0	95	-15	260					
TRANSOL EXTRA XSP 460	901,0	460,0	96	-12	266					
NEW TRANSOL EXTRA XSP 1000	899,8	1050,0	118	-18	249				Complies with: David Brown	

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

*Product available periodically on special order
** Kinematic viscosity at 100°C

Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point [°C]	Corrosive effect on Cu plate, 100°C/3h	FZG	Quality class	Approval / certificate	Product description
TRANSOL SP-68	877,0	70,0	101	-30	250	1	12	DIN 51517-3 CLP ISO 6743-6 CKD ISO 12925-1 CKD AGMA 9005-F 16 AS U.S. Steel 224	Complies with: · David Brown Typ M, A & E	Industrial gear oils produced from selectively refined mineral oils and an EP (Extreme Pressure) additive package. These products are intended for heavily loaded mechanical gearboxes in industrial equipment operating at temperatures up to 120°C.
TRANSOL SP-100	878,0	100,0	101	-30	262					
TRANSOL SP-150	883,0	150,0	99	-21	271					
TRANSOL SP-220	891,0	219,0	97	-18	272					
TRANSOL SP-320	896,0	319,0	96	-12	273					
TRANSOL SP-460	898,0	455,0	97	-9	274					
TRANSOL SP-680	901,0	678,0	98	-12	290					
TRANSOL SP-1000	902,0	1002,0	104	-6	298					
TRANSOL CLP 68	878,0	69,0	97	-27	254	1	-	DIN 51517-3 CLP ISO 6743-6 CKC ISO 12925-1 CKC AGMA 9005-F 16 AS U.S. Steel 224	Complies with: · David Brown Typ M, A & E	Industrial gear oils produced from selectively refined mineral oils and an EP (Extreme Pressure) additive package. These products are intended for heavily loaded mechanical gearboxes in industrial equipment operating at temperatures up to 120°C.
TRANSOL CLP 100	878,0	100,0	102	-30	260					
TRANSOL CLP 150	885,0	147,0	99	-24	273					
TRANSOL CLP 220	888,0	215,0	98	-21	274					
TRANSOL CLP 320	894,0	316,0	97	-12	275					
TRANSOL CLP 460	899,0	450,0	97	-9	274					
TRANSOL CLP 680	902,0	670,0	101	-12	270					
TRANSOL 68	885,0	68,0	99	-27	229	1	12	DIN 51517-3 CLP ISO 6743-6 CKC ISO 12925-1 CKC	-	Industrial gear oils produced from selectively refined mineral oils and an EP (Extreme Pressure) additive package. These products are intended for heavily loaded mechanical gearboxes in industrial equipment operating at temperatures up to 100°C.
TRANSOL 100	890,1	97,9	96	-25	230					
TRANSOL 150	894,0	158,8	96	-24	235					
TRANSOL 220	897,8	224,6	95	-24	260					
TRANSOL 320	901,3	317,2	95	-15	261					
TRANSOL 460	904,6	471,5	94	-15	261					
TRANSOL 680 *	904,6	676,5	95	-15	260					
TRANSOL GL-1 *	890,0	18 **	96	-14	290	1	-	GL-1	-	Basic gear oil for lightly loaded enclosed industrial gearboxes.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

*Product available periodically on special order

** Kinematic viscosity at 100°C

Product name	Kinematic viscosity at 40°C [mm²/s]	Viscosity index	Flash point, COC [°C]	Pour point [°C]	Quality class	Product description
CORALIA L-DAA 46 *	44,7	100	223	-12	ISO 6743-3 L-DAA DIN 51506 VB, VBL	Oils intended for the lubrication of air-cooled piston compressors and rotary vane compressors with drip-feed lubrication operating under light-duty conditions.
CORALIA L-DAA 68 *	68,0	97	248			
CORALIA L-DAA 100	97,4	99	270			
CORALIA L-DAA 150	147,4	97	280			
CORALIA L-DAA 220	216,4	97	285			
CORALIA L-DAB 32 *	32	90	>200	-15	ISO 6743-3 L-DAB	Oils intended for the lubrication of air-cooled piston compressors and rotary vane compressors with drip-feed lubrication operating under medium-duty conditions.
CORALIA L-DAB 46	46,1	99	230	-15		
CORALIA L-DAB 68	65,8	100	242	-27		
CORALIA L-DAB 100	96,3	99	263	-12		
CORALIA L-DAB 150	145,1	97	276	-10		
CORALIA L-DAB 320	320,9	92	-	-9	ISO 6743-3 L-DAA, L-DAB DIN 51506 VDL	Oils intended for the lubrication of air-cooled piston compressors, screw compressors (with or without oil injection), and vane compressors (with oil injection), operating under medium-duty conditions.
CORALIA L-DAB 460	476,1	93	-	-6		
CORALIA VDL 32	30,8	-	175	-9		
CORALIA VDL 46	44,5	-	195	-12		
CORALIA VDL 68	64,7	-	195	-12		
CORALIA VDL 100	104,4	-	205	-9		
CORALIA T 46	41,7	-	232	-9	ISO 6743-3 L-DAH ISO 6743-5 L-TSE, L-TGE DIN 51524 cz.1 L-HL	Oil intended for the lubrication of rotary air compressors operating under medium-duty conditions. It may also be used as a hydraulic fluid in turbine control systems and for the lubrication of circulating systems in steam, gas, and water turbines.
CORALIA ST 32	32,2	102	219	-37	ISO 6743-3 L-DAH ISO 6743-5 L-TSE, L-TGE ISO 6743-4 L-HL DIN 51524 cz.1 L-HL	Oils intended for the lubrication of rotary screw air compressors operating under medium-duty service conditions with varying operating temperatures. They are used, among others, in the power industry for integrated systems of pumps, compressors, turbines with gearboxes and couplings, as well as centrifugal rotary turbocompressors.
CORALIA ST 46	46,1	100	232	-33		
CORALIA ST 68	66,8	101	248	-28		
CORALIA PE 32	32,4	-	-	-56	ISO 6743-3 L-DAJ	Synthetic oils (based on polyalphaolefins) intended for the lubrication of rotary, vane, and screw air compressors operating under heavy-duty conditions.
CORALIA PE 46	45,2	-	-	-54		
CORALIA PE 68	62,2	-	-	-48		
CORALIA PAG 85 *	89,4	216	304	-46	ISO 6743-3 L-DGC	Synthetic oil based on water-insoluble polyalkylene glycols, intended for the lubrication of screw compressors compressing natural gas, LPG, and other hydrocarbon gases under heavy-duty conditions. The product is not miscible with mineral oils or other synthetic oils and must not be used to top up existing oil in such systems, nor should it be mixed in the reverse case. When switching from a previously used mineral/synthetic compressor oil to this oil, the replacement procedure must include cleaning and flushing of the compressor lubrication system.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order

Product name	Kinematic viscosity at 40°C [mm²/s]	Viscosity index	Flash point, COC [°C]	Pour point [°C]	Quality class	Product description
CORALIA HC 100	101,8	-	236	-37	ISO 6743-3 L-DAA, DAG	Oils for piston and rotary air compressors, lubricated by splash or injection, intended for operation under normal and heavy-duty conditions.
CORALIA HC 150	136,4	-	248	-34		
CORALIA VACUUM 100	103,8	-	280	-10 **	-	Oil intended for use in rotary vacuum pumps.
CORALIA K-20	22,0	-	235	-5	-	SAE 60 viscosity grade oil intended for the lubrication of special-purpose medium- and high-pressure piston compressors.
CYLITEN 460 N	450,0	97	320	-8	ISO 6743-4 L-HL DIN 51506 VB, VBL	Oil classified among lubricating cylinder oils, intended for the lubrication of high-pressure compressor cylinders, valve gear components and packings of steam engines, as well as circulating systems requiring high-viscosity, emulsification-resistant oils.

** Pour point [°C]

Product name	Kinematic viscosity at 50°C [mm²/s]	Flash point, COC [°C]	Pour point [°C]	Quality class	Application
FRIGOL TZ-13	13,4	176	-48	PN-C-96072:1974 TZ-13	Oils for the lubrication of ammonia refrigeration compressors, e.g. two-stage compressors with circulating lubrication systems.
FRIGOL TZ-19	23,1	228	-34	PN-C-96072:1974 TZ-19	
FRIGOL TZ-28	29,5	230	-34	PN-C-96072:1974 TZ-28	
FRIGOL WZ	31,2 **	164	-45	PN-C-96072:1974 WZ	Oil intended for the lubrication of ammonia and carbon dioxide refrigeration compressors, where the evaporator temperature reaches as low as -45°C, e.g. single-stage, horizontal, low-speed compressors.
FRIGOL M 68	66,4 ***	202	-35	ISO 6743-3 L-DRE	Oil intended for the lubrication of all types of refrigeration compressors operating with refrigerants from the CFC group (e.g. R12), HCFC group (e.g. R22), and ammonia.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

** Kinematic viscosity at 20°C
*** Kinematic viscosity at 40°C

Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point [°C]	Corrosive effect on Cu plate, 100°C/3h	Air release property of oils at 50°C [min.]	RPVOT (oxidation test) [min.]	Quality class	Approvals		Product description
TURBINEX POWER TG PREMIUM 32	857,3	31,9	115	-18	212	1	2,7	1520	DIN 51515 cz.1 DIN 51515 cz.2 ISO 8068	Holds: · DOOSAN Skoda Power Tp0010P · Siemens TLV 901305 · Siemens TLV 901304 · Siemens TLV 901306	Complies with: · MAN TED 1000454696 Rev.03 · GEK 107395A · Solar ES9-224 · BS 489	Turbine oils recommended for the lubrication and cooling of bearings in gas and steam turbines, and combined cycle gas turbines (CCGT) also equipped with gearboxes. These oils are designed for turbine systems operating under elevated temperatures and pressures. They may also be used as hydraulic fluids in turbine control systems and for lubrication purposes. These are low varnish oils, designed for use in demanding operating conditions. The oils are characterised by excellent oxidation resistance and exceptionally low deposit-forming tendency.
TURBINEX POWER TG PREMIUM 46	857,3	46,6	113	-18	244	1	2,7	1447		Holds: · MAN TED 1000454696 Rev.03 · DOOSAN Skoda Power Tp0010P · Siemens TLV 901305 · Siemens TLV 901304	Complies with: · GE HTGD 90117 · GEK 107395A · Solar ES9-224 · BS 489	
TURBINEX TG PREMIUM 32	842,5	31,6	132	-24	244	1	2,1	>2300	DIN 51515 cz.1 DIN 51515 cz.2 ISO 8068 DIN 51524 cz.1 HL DIN 51517 cz.2 CL	Holds: · Alstom HTGD 90117 · Siemens TLV 901304 · Siemens TLV 901305 · DOOSAN Skoda Power	Complies with: · Solar ES 9-224 · BS 489	Turbine oils recommended for the lubrication and cooling of bearings in gas and steam turbines, and combined cycle gas turbines (CCGT) also equipped with gearboxes. These oils are designed for turbine systems operating under elevated temperatures and pressures. They may also be used as hydraulic fluids in turbine control systems and for lubrication purposes. The oils are characterised by excellent oxidation resistance and exceptionally low deposit-forming tendency.
TURBINEX TG PREMIUM 46	845,6	43,6	130	-21	250	1	2,5	>2300				
NEW REMIZ SUPER TG LR 32	840,0	32,5	132	-30	240	1a	3	>1400	DIN 51515 cz.1 DIN 51515 cz.2 ISO 8068 ISO 6743-5 L-TGE, L-TSE ISO 6743-4 L-HL ISO 6743-3 L-DAJ	Holds: · Siemens TLV 901304 · Siemens TLV 901305 · Siemens TLV 901306	Complies with: · GE HTGD 90117 V0001	A high-quality, multi-purpose turbine oil formulated using special Group III base oils. This product is designed for the lubrication of gas turbines, steam turbines, combined cycle gas turbines (CCGTs), compressors and related gearboxes during the longest possible operating cycles under a variety of operating conditions, including, in particular, reduced operating temperatures.
REMIZ SUPER TG 32	844,5	32,7	129	-19	235	1	1,1	>1100	DIN 51515 cz.1 DIN 51515 cz.2 ISO 8068 ISO 6743-5 L-TGE, L-TSE ISO 6743-4 L-HL ISO 6743-3 L-DAJ	Holds: · GE HTGD 90117 V0001 AD · Siemens TLV 901304 · Siemens TLV 901305	Complies with: · Solar ES9-224	Turbine oils recommended for the lubrication and cooling of bearings in gas and steam turbines, and combined cycle gas turbines (CCGT) also equipped with gearboxes. These oils are designed for turbine systems operating under elevated temperatures and pressures. They may also be used as hydraulic fluids in turbine control systems and for lubrication purposes. The oils are characterised by excellent oxidation resistance and exceptionally low deposit-forming tendency.
REMIZ SUPER TG 46	846,5	48,1	133	-16	254	1	2,0	>1000		Holds: · Alstom HTGD 90117 · Siemens TLV 901304 · Siemens TLV 901305		
REMIZ TG 32	867,1	31,7	100	-18	218	1	1,7	>750	DIN 51515 cz.1 DIN 51515 cz.2 ISO 8068 ISO 6743-5 L-TGE, L-TSE ISO 6743-4 L-HL ISO 6743-3 L-DAH	Holds: · Alstom HTGD 90117 · Siemens TLV 901304 · Siemens TLV 901305	Complies with: · Solar ES9-224	Turbine oils for the lubrication of gas turbines and rotary air compressors operating under medium-duty conditions and varying operating temperatures. They can also be used in water, steam, and gas turbines (including those with gearboxes), in combined cycle power generation systems with a common circuit for both steam and gas turbines, in hydrodynamic couplings with gearboxes, in compressors, feedwater pumps, circulating water pumps, and other auxiliary equipment.
REMIZ TG 46	873,2	45,4	99	-16	232	1	2,8	>750		Holds: · Alstom HTGD 90117 · Siemens TLV 901304		
REMIZ TU 32	867,8	31,8	99	-19	224	1	1,6	>400	DIN 51515 cz.1 ISO 8068 ISO 6743-5 L-TSA ISO 6743-4 L-HL	Holds: · Alstom HTGD 90117 · Siemens TLV 901304 · Skoda Energo	-	Circulating turbine oils recommended for the lubrication of steam and water turbines, as well as associated hydraulic systems and control systems, operating under varying temperature conditions.
REMIZ TU 46	873,0	45,6	98	-17	234	1	3,0	>400		Holds: · Alstom HTGD 90117 · Siemens TLV 901304	-	
REMIZ TU 68	873,8	66,0	99	-12	251	1	4,4	>400		-	-	

Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Kinematic viscosity at 50°C [mm²/s]	Pour point [°C]	Flash point [°C]	Corrosive effect on Cu plate, 100°C/3h	Demulsibility number [s]	Standards	Product description
TURBINOWY T-30	871,0	51,1	-	-12	234	-	100	ISO 6743-5 L-TSA	Turbine oils for circulating lubrication of bearings in steam turbines, water turbines, and turbo-units with gearboxes in systems with a common oil circuit.
TURBINEX T-30 *	876,9	49,6	30,1	-15	236	1	120	ZN-66/MPCh/NF-104	

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order

COMPLIES WITH – complies with the approval requirements
HOLDS – holds approval or certificate



Product name	Kine-matic viscosity at 100°C	Pour po-int [°C]	Flash po-int, COC [°C]	Total Base Number (TBN) [mg-KOH/g]	Struc-tural viscosity CCS at -20°C	Sulpha-ted ash [(%m/m)]	Approvals	Product description
DELGAS L 40	13,8	-18	272	5,4	-	0,48	Holds: - MWM TR-0199-99-2105; - INNIO Jenbacher TA 1000-1109, typoszeregi 2, 3, 4 (version A and B) and 6 (version C and E), class A gases, Bergen Engines AS: engine types B35:40, C26:33 and type K, for medium-speed engines fuelled by natural gas.	Oil for use in various types of stationary, four-stroke gas engines (including Jenbacher, MWM, Bergen) primarily fuelled by natural gas. It may be used in three-way and selective catalytic converter systems.
DELGAS LA 40*	13,8	-18	262	4,9	-	0,53	Holds: INNIO Waukesha Gas Engine (Service Bulletin 12-1880AW)	This low-ash oil is intended for use in various types of stationary, four-stroke gas engines, fuelled mainly by natural gas. The dispersant and detergent additives contained in the oil minimise the risk of sludge and deposit formation, ensuring exceptional engine cleanliness.
DELGAS PREMIUM L 40 *	13,9	-18	276	4,6	-	0,53	-	Oil intended for use in various types of stationary, four-stroke naturally aspirated and turbocharged gas engines (including Jenbacher) fuelled by methane-rich gases such as landfill gas, mine gas, and biogas. It may be used in three-way and selective catalytic converter systems.
DELGAS M 40	13,7	-31	274	10,5	-	0,89	-	Oil for use in various types of stationary, four-stroke naturally aspirated and turbocharged gas engines fuelled by methane-rich gases such as landfill gas, mine gas, and biogas. It may be used in three-way and selective catalytic converter systems.
DELGAS L 30 *	12,5	-27	266	6,3	-	0,5	-	Low-ash engine oil intended for the lubrication of stationary engines fuelled by natural gas and other similar pipeline fuels.
DELGAS L 10W-40 *	14,2	-39	226	6,3	5930 **	0,5	-	
DELGAS EXTRA 10W-40	14,1	-33	237	9	6260 **	0,86	-	Medium-ash engine oil intended for the lubrication of stationary engines fuelled by lean and contaminated gases containing hydrogen sulphide and other acidic components (e.g. biogas, landfill gas).

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order
** Structural viscosity measured at -25°C

HOLDS – holds approval



SPECIALIST OIL SERVICE

ORLEN OIL was one of the first companies in the lubricants industry on the Polish market to introduce a comprehensive range of service offerings for industrial enterprises using lubricants in their production processes.

The professional oil service – POWER SERVICE – offers a wide range of services delivered directly at the User’s site.

As part of the POWER SERVICE offering, the following service areas can be distinguished:

- Oil monitoring (working fluid analysis)
Regular oil analyses enable the assessment of oil condition in terms of the degree of degradation, changes in performance properties, and the presence of contaminants resulting from wear processes or from the machine's operating environment. Oil analyses provide valuable information about the condition of the machinery and enable the early detection of worn components and parts, thereby effectively preventing potential failures.
- Maintenance of industrial oil systems
The maintenance of oil systems is primarily related to the filtration of oils to achieve the required cleanliness class, complete replacement of hydraulic, gear, turbine, and other oils, as well as topping up operational fluids (so-called top-ups), and cleaning of systems and tanks.
- Application of process oils and servicing of metalworking cooling and lubricating systems
Water-based cooling and lubricating emulsions, used in metal cutting and grinding processes, require special monitoring and maintenance during operation.
- Comprehensive oil audit
Verification of equipment operating conditions to ensure correct lubricant selection. Standardisation of lubricants used within the production plant. Development of lubrication plans aimed at implementing an effective and sustainable lubrication management programme. Training and consultancy.

Oil Service Team

ul. Fabryczna 22
32-540 Trzebinia
serwis@orlenoil.pl

Phone numbers:

+48 24 201 03 64
+48 24 201 03 80
+48 24 201 03 91



Product name	API quality class	SAE viscosity class	Kinematic viscosity at 100°C [mm ² /s]	Viscosity index	Pour point [°C]	Flash point [°C]	Total base number [mgKOH/g]	Product description
IBIS RDEO 40	CF/SF/CF-4	40	14,5	102	-36	267	13,5	Engine oils of the RDEO type (Rail Diesel Engine Oil). They provide excellent lubrication for diesel locomotive engines, auxiliary marine engines, and stationary units operating under heavy-duty conditions. The oil can also be classified as meeting the requirements of LMOA Generation V.
IBIS RDEO 50	CF/SF/CF-4	50	18,5	100	-30	273	12,3	
IBIS RDEO 60	CF/SF/CF-4	60	23,6	99	-24	292	12,3	
IBIS RDEO 70 HT	CF/SF/CF-4	>60	28,4	98	-18	287	12,5	Seasonal (summer) RDEO-type engine oil (Rail Diesel Engine Oil) ensures excellent lubrication for four-stroke Diesel engines used in railway machinery. It can also be used to lubricate petrol and diesel engines in stationary power generators, technical equipment, and auxiliary marine engines operating in very high ambient temperatures and heavy-duty conditions. The oil can also be classified as meeting the requirements of LMOA Generation V.
IBIS RDEO HPD 40	CF-2/CF/CD	40	15,0	95	-15	260	13,0	The oil is designed for lubricating high-performance diesel railway engines operating under heavy-duty conditions. It may also be used for the lubrication of similar types of diesel engines in other technical equipment. Recommended for engines where the use of zinc-free oils is required. The product is approved by General Electric Generation 4 Long Life.
IBIS RDEO LA	CF	40	13,7	104	-34	270	14,0	Provides excellent lubrication for four-stroke diesel engines used in railway machinery engines, other stationary land-based engines, and auxiliary marine engines where, due to design requirements, a zinc-free engine oil is required for operation under heavy-duty conditions. The oil offers high dispersant-detergent potential and oxidation resistance.
IBIS RDEO STANDARD 40	CD	40	15,3	95	-18	250	9,0	Mineral engine oil intended for the lubrication of high-performance diesel railway engines operating under heavy-duty conditions. It may also be used for the lubrication of similar types of diesel engines in other technical equipment.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl



Product name	Kinematic viscosity at 100°C	Total base number (TBN) [mg-KOH/g]	Pour point [°C]	Viscosity and quality class	Approvals	Product description	
MARINOL RG 330 *	11,5	4	-15	SAE 30	-	SO-type oils (System Oil) for engines operating on light fuel. Intended for the circulating lubrication of marine crosshead engines.	
MARINOL RG 350 *	18,0	4	-12	SAE 50			
MARINOL RG 630	11,5	7	-15	SAE 30			
MARINOL RG 640	14,5	7	-15	SAE 40			
MARINOL RG 650	18,5	7	-12	SAE 50			
MARINOL RG 1030 *	11,5	11	-15	SAE 30	Complies with: · Pielstick · MAN B&W · MAN Augsburg · New Sulzer Diesel · Wartsila	TPEO-type oils (Trunk Piston Engine Oil), intended for the lubrication of marine trunk piston engines operating on light fuel.	
MARINOL RG 1040	14,5	11	-15	SAE 40			
MARINOL RG 1230	11,5	13	-15	SAE 30, API CF			
MARINOL RG 1240	14,5	13	-15	SAE 40, API CF			
MARINOL RG 1530	11,5	16	-15	SAE 30, API CF			
MARINOL RG 1540	15,0	16	-15	SAE 40, API CF		TPEO-type oils (Trunk Piston Engine Oil), intended for the circulating and cylinder lubrication of marine trunk piston main propulsion engines operating on fuel with a sulphur content of up to approximately 2%.	
MARINOL RG 2030	11,5	21	-15	SAE 30, API CF			
MARINOL RG 2040	14,5	21	-15	SAE 40, API CF		TPEO-type oil (Trunk Piston Engine Oil) for cylinder lubrication of crosshead engines during running-in and operation on low-sulphur fuel.	
MARINOL RG 2050	22,0	21	-12	SAE 50, API CF		Modern cylinder oil (MCL) for two-stroke marine engines and for the lubrication of crosshead main propulsion engines.	
MARINOL RG 2550 *	19,5	25	-18	SAE 50			
MARINOL RG 3030	11,5	32	-15	SAE 30, API CF			TPEO-type oils (Trunk Piston Engine Oil), intended for the circulating and cylinder lubrication of marine trunk piston main propulsion engines and generators operating on heavy fuel.
MARINOL RG 3040	14,2	32	-15	SAE 40, API CF			
MARINOL RG 4030 *	11,7	40	-15	SAE 30, API CF			
MARINOL RG 4040	14,5	40	-12	SAE 40, API CF			
MARINOL RG 4050	19,5	40	-27	SAE 50	Holds: · WinGD · EVERLLENCE (formerly MAN ES) Complies with: · Pielstick · New Sulzer Diesel	Modern cylinder oils (MCL) for two-stroke marine engines and for the circulating and cylinder lubrication of main propulsion engines.	
MARINOL RG 7050	19,2	70	-27	SAE 50			
MARINOL RG 8550 *	20,0	87	-27	SAE 50	-		
MARINOL RG 10050 *	19,5	100	-	SAE 50	Holds: · EVERLLENCE (formerly MAN ES) Complies with: · WinGD · Pielstick · New Sulzer Diesel		
MARINOL RG 14050 *	19,5	140	-24	SAE 50			Complies with: · WinGD · EVERLLENCE (formerly MAN ES) · Pielstick · New Sulzer Diesel
MARINOL MW 50	21,0	4,0	-18	SAE 50	-	Oil intended for the lubrication of high-speed marine diesel engines operating on light fuel. Provides proper lubrication of the engine's cylinder and crankshaft systems.	
OLEJ OKRĘTOWY SC-22	22,0	-	-5	SAE 60	-	Engine oil intended for the lubrication of cylinders in high-power marine engines.	

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order

COMPLIES WITH – complies with the approval requirements
HOLDS – holds approval

Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Kinematic viscosity at 100°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point [°C]	Quality class	Approval / Standard	Product description
VELOL P 150	878,1	152,9	15,5	102	-33	280	DIN 51502 C	Complies with: · DIN 51517-1 C · DIN 51517-2 CL	Circulating oils characterised by excellent oxidation resistance and good water separability. The products are compatible with SRE-NBR 28/SX type seals and are used in circulating systems of machinery, low and medium loaded enclosed gearboxes, and lightly loaded piston, rotary, and vane air compressors.
VELOL P 220	885,6	228,9	19,9	101	-27	284			
VELOL M 100	890,0	98,9	11,2	99	-24	258			
VELOL M 220	897,0	217,2	18,3	92	-15	250			
VELOL M 320	900,0	327,6	24,3	95	-21	290			
VELOL M 460	902,0	475,0	30,6	93	-15	315			
VELOL RC 32	875,7	32,9	-	101	-21	215	ISO 6743-13 GB DIN 51502 CG	Complies with: · Fives Cincinnati P-53 Complies with: · Fives Cincinnati P-47 Complies with: · Fives Cincinnati P-50	Oils for all types of slideways, particularly for the lubrication of horizontal slideways operating at moderate temperatures and under moderate to medium loads. They ensure proper operation of the slideways with particular emphasis on optimal friction characteristics and the elimination of "stick-slip" phenomena.
VELOL RC 46	881,9	47,2	-	101	-18	217			
VELOL RC 68	874,5	71,5	-	>95	-21	>220			
VELOL RC 100	887,9	98,4	-	98	-15	243			
VELOL RC 220	889,6	221,5	-	>95	-12	>230			
VELOL RC 320	900,4	315,3	-	92	-12	255			
VELOL 9Q	844,2	10,0 **	-	-	-44	146	-	-	Machine oils for through-feed and bath lubrication of high-speed components in textile machinery, machine tools, and other precision machine elements in accordance with lubrication instructions. They can also be used for the mechanical processing of metals such as steel and brass, for operations like turning, milling, and threading.
VELOL 19	856,6	20,2 **	-	-	-43	168	-	-	Oil intended for the lubrication of cylinders, valve gear components, and packings of steam engines, circulating lubrication of bearings, and wherever high anti-wear properties are not required.
VELOL SM-30	900,7	459,2	30,1	94	-15	312	ISO 6743-1 AN	-	Oils used for lightly and moderately loaded rotating machine components such as rolling and plain bearings, slideways, or spindles. They can also be used in the cleaning and flushing of mechanical machine components and tanks.
VELOL 8	866,9	12,2	-	100	-12	176			
VELOL 10	864,2	21,1	-	100	-27	196			
VELOL 15	874,3	31,5	-	102	-24	222			
VELOL 20	879,2	45,4	-	99	-15	222			
VELOL 50	888,1	99,3	-	91	-24	264			
VELOL 60	891,9	115,6	-	93	-15	232			

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

** Kinematic viscosity at 20°C

Product name	Density at 15°C [kg/m³]	Kinematic viscosi- ty at 40°C [mm²/s]	Kinematic vi- scosity at 100°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point [°C]	Quality class	Approval / Standard	Product description
L-AN 10	853,4	10,3	2,7	101	-18	154	ISO 6743-1 AN DIN 51502 AN	Complies with: · DIN 51501	Machine oils intended for lightly or moderately loaded working components of industrial machinery and equipment, such as rolling and plain bearings, slideways, mechanical gearboxes, spindles, and auxiliary friction nodes.
L-AN 15	850,4	16,2	3,6	110	-15	172			
L-AN 22	863,2	21,1	4,2	99	-15	210			
L-AN 32	873,1	36,3	5,7	96	-18	224			
L-AN 46	879,4	45,4	6,6	98	-12	225			
L-AN 55	883,0	58,1	-	97	-9	244			
L-AN 68	874,5	66,4	8,4	97	-9	240			
L-AN 100	876,6	98,4	10,9	95	-9	258			
L-AN 150	883,0	145,1	13,8	90	-9	276			
L-AN 10Z *	879,0	10,5	-	100	-40	158			
L-AN 22Z *	870,0	22,0	-	90	-42	199	ISO 6743-1 AN DIN 51502 AN	Complies with: · DIN 51501	Low-pour-point machine oils intended for lightly or moderately loaded working components of industrial machinery and equipment, such as rolling and plain bearings, slideways, mechanical gearboxes, spindles, and auxiliary friction nodes.
L-AN 15Z	853,8	15,8	-	-	-33	-			
L-AN 46Z	880,8	48,1	-	-	-30	-			
L-AN 68Z	885,5	66,2	-	-	-24	-			
L-AN 320Z	899,6	328,5	-	-	-18	281			

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

**Kinematic viscosity at 20°C

Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 50°C [mm²/s]	Kinematic vi- scosity at 100°C [mm²/s]	Pour point [°C]	Flash point [°C]	Acid number [mg KOH/g]	Standard	Product description
COMPOUNDED MACHINE OIL MN-11	896,0	82,2	-	-13	292	0,15	PN-56/C-96074	Compounded machine oils are a blend of mineral oils and oxidised vegetable oil. They are used for the lubrication of: bearings of steam engines in marine applications, bearings exposed to contact with water, with which compounded machine oils form stable lubricating emulsions, and bearings of machines subjected to higher unit loads.
COMPOUNDED MACHINE OIL MN-15 *	898,4	111,2	-	-13	286	0,02		
CYLINDER OIL CL-17 (PN-240)	893,4	-	22,7	-9	>240	-	PN-61/C-96095 DIN 51519, DIN 51510 for ZB-class oils	Oils intended for the lubrication of cylinders, valve gear components and packings of steam engines, circulating systems requiring high-viscosity, non-emulsifying machine oils, mechanical gearboxes, and other highly loaded systems requiring oil with high adhesiveness and water resistance. Cylinder oils are used in steam machinery systems operating with saturated steam at the following temperatures: – up to 250°C – cylinder oil CL-17 (PN-240) – up to 290°C – cylinder oil CL-30 (PP-280) – up to 310°C – cylinder oil CL-40 (PW-300)
CYLINDER OIL CL-30 (PP-280)	901,2	-	39,7	-9	>280	-		
CYLINDER OIL CL-40 (PW-300)	902,0	-	55,0	-9	>300	-		
CYLINDER OIL CL-1500	903,0	1472,0 **	-	-	330	-	DIN 51519, DIN 51510 for ZB-class oils	Cylinder oil intended for the lubrication of slideways and cylinders of steam engines, and other systems where contact with high-temperature steam is possible, high-pressure compressor cylinders, valve gear components and packings of steam engines, and other applications requiring a high-viscosity oil.
CYLINDER OIL P 28	904,0	-	29,4	-6	308	-	-	Cylinder oils are intended for the lubrication of cylinders, valve gear components, and packings of steam engines. The primary function of these oils is to prevent wear of rings and cylinders, and to seal working areas operating at high temperatures and in the presence of steam.
CYLINDER OIL B 28 *	902,8	-	31,3	-6	325	-	-	
U AXLE OIL	874,4	44,0	-	-23	246	-	PN-61/C-96097	Oil primarily intended for the lubrication of plain bearings in steam locomotives, railway carriages, and trams.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order

** Kinematic viscosity at 40°C

Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Kinematic viscosity at 100°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point [°C]	Quality class	Product description
GRAFITOL	900	545,0	34,0	-	-12	325	ISO 6743-1 L-AN DIN 51502 AN	Process oil used mainly in the production of printing inks and as a component in rubber compounds. It is also used as an anti-adhesive agent in the processing of mineral wool and in other non-standard applications requiring a technologically pure, high-viscosity process oil.
KVG 68 OIL	874	68,5	8,7	99	-15	255	ISO 6743-1 L-AN DIN 51502 AN DIN 51517 CL	Mineral process oils intended for various technological processes such as the production of plasticisers, rubber compounds, resin viscosity modifiers, and as a component in adhesives. They are also used as lubricants and in unconventional industrial applications. KVG 150 Z oil additionally features a reduced pour point – enabling operation at lower temperatures. KVG 460 oil is used in the production of thermal insulation and other specific applications.
KVG 100 OIL	875	98,0	11,2	99	-12	272		
KVG 150 OIL	883	151,5	14,9	97	-14	285		
KVG 150 Z OIL *	884	153,6	15,0	98	-25	275		
KVG 460 OIL	898	453,1	-	95	-6	315		
KVG 220 OIL	890	218,6	19,0	98	-18	270	ISO VG 220 ISO L-CKC DIN 51517 cz.3 CLP	This oil is used for the lubrication of lightly loaded components of industrial machinery (bearings, slideways, mechanical gearboxes, etc.) as well as in other specialised industrial processes. The oil may be used in enclosed gearboxes, gear cases, and other highly loaded systems requiring an oil with enhanced load-carrying film strength. The oil should always be tested prior to final application to verify suitability for the specific use.
KVG 1000 OIL *	-	1000,0	-	-	-	230	ISO 6743-1 L-AN DIN 51502 AN DIN 51517 CL	Mineral process oil mainly used as a raw material in the production of rubber compounds.
VASELINE OIL 17	850	16,5	-	-	-6	198	ISO 6743-1 L-AN ISO 6743-2 L-FC DIN 51502 AN DIN 51517 CL	Oil intended for the lubrication of precision machinery and equipment (bearings, slideways, mechanical gearboxes, spindles, etc.), high-speed bearings (spindle bearings), and auxiliary friction nodes.
GDB 6 PROCESS OIL	880	125,0	13,5	99	-9	286	ISO L-AN	GDB process oils are used in various branches of industry as a component in the production of industrial oils or as an auxiliary product in processing operations. They are applied in a variety of technological processes, providing corrosion protection, good adhesion to lubricated components, suitable temperature characteristics, and improvement of the final product quality.
GDB 160 PROCESS OIL	871	34,8	5,6	97	-15	223		
GDB 500 PROCESS OIL	875	87,5	10,5	100	-10	277		
GDB 900 PROCESS OIL	888	222,0	19,0	96	-6	290		
GDB 500 ZLF PROCESS OIL	877	97,0	11,2	99	-9	280		
GDB 150 ZLF PROCESS OIL	868	31,1	5,2	100	-15	230		
P-90 PROCESS OIL	875	86,0	10,4	102	-9	270	ISO L-AN	Process oils intended for the lubrication of lightly loaded components of industrial machinery and other specialised applications. Used in various industrial sectors as a product component, an industrial oil component, or as an auxiliary product in processing operations.
P-600 PROCESS OIL	900	521,0	33,0	96	-6	320		

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order



Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Flash point [°C]	Acid number [mg KOH/g]		Quality class	Application method	Product description
KONKRETON BIT ****	884,7	10,7	-	-		ISO 6743 B	· spray · roller	Low-viscosity, biodegradable release oil intended for the lubrication of moulds made of steel, aluminium, plastics, and wood, used in the production of precast concrete elements and other concrete components. The product also provides short-term corrosion protection for steel moulds.
KONKRETON V	842,7	4,7	146	6,1		ISO 6743 B	· spray	Release oil intended for the lubrication of moulds used in the production of precast concrete elements and other concrete components. The product can be used for the lubrication of cold metal and plastic moulds.
KONKRETON VS	849,4	5,7	115	6,2		ISO 6743 B	· spray	Release oil intended for the lubrication of moulds used in the production of precast concrete elements and other concrete components. The product can be used for the lubrication of cold moulds.
KONKRETON L	866,5	21,8	222	3,3		ISO 6743 B	· spray	Release oil intended for the lubrication of cold moulds used in the production of concrete elements and lightweight aerated concrete blocks.
KONKRETON M	863,7	23,9	206	1,4		ISO 6743 B	· spray	Release oil intended for the lubrication of cold moulds used in the production of concrete elements and lightweight aerated concrete blocks. Contains additives that improve adhesion to the mould walls.
KONKRETON L PLUS	878,5	76,5	260	2,9		ISO 6743 B	· brush	Oil intended for mould lubrication as a release agent in the production of aerated concrete. The oil ensures easy release of the product and protects the mould against corrosion.
KONKRETON N	878,2	38,8	228	3,1		ISO 6743 B	· spray	Release oil intended for the lubrication of moulds used in the production of concrete elements and lightweight aerated concrete blocks. These oils can be applied by spray method to cold moulds during aerated concrete production.
KONKRETON P	887,4	79,8	254	3,2		ISO 6743 B	· brush	Release oil intended for the lubrication of moulds used in the production of concrete elements and lightweight aerated concrete blocks.
KONKRETON S	891,1	112,5	278	3,3		ISO 6743 B	· spray · roller	Release oils intended for the lubrication of moulds used in the production of aerated concrete blocks, where an increased thickness of the separating layer is required. Thanks to their carefully selected properties, these products can be used year-round in the production process.
KONKRETON XS	894,4	156,1	280	3,0		ISO 6743 B		
KONKRETON T	-	129,2	258	4,4		ISO 6743 B	· spray · brush · roller	This anti-adhesive oil is designed for lubricating moulds used in the production of concrete components and lightweight aerated concrete blocks. It is suitable for lubricating both steel and wooden moulds. The product can be applied by spraying, roller or brush.
KONKRETON XS-10	847,7	10	96	6,0		ISO 6743 B	· spray · brush	Anti-adhesive oil (release agent) designed for lubricating moulds to prevent sticking during the production of aerated concrete. It may also be used in other applications, subject to prior agreement with the manufacturer/customer. This product facilitates the demoulding of concrete products, effectively preventing the material from sticking to the mould surfaces, while also providing corrosion protection for steel moulds and other components.
KONKRETON AZ	845,5	9,4	156	3,2		ISO 6743 B	· spray · brush	This anti-adhesive oil is designed for lubricating moulds used in the production of lightweight aerated concrete blocks. It is suitable for lubricating both steel and wooden moulds. The product can be applied by spraying, roller or brush.
KONKRETON MK S-E	874,6	7,2	142	6,7		ISO 6743 B	· spray · brush · roller	Low-viscosity release oils intended for the lubrication of moulds made of steel, aluminium, plastics, and wood, used in the production of precast concrete and ceramic elements.
KONKRETON MK S-L *	863,5	6,2	150	6,4		ISO 6743 B		
KONKRETON SEPAR	864,3	5,5	142	13,4		ISO 6743 B		
KONKRETON 30 *	867,8	6,8	146	74		ISO 6743 B		
OLEJ ANTYADHEZYJNY B-0	864,1	17,5	184	6,0		ISO 6743 B	· spray · brush	Release oil intended for the lubrication of large-surface steel moulds operating under high unit pressures.
FORMEX Q	847,8	12,5 **	110	5,9		ISO 6743 B	· spray · brush · roller	Release oil intended for the lubrication of steel moulds used in the production of precast concrete and reinforced concrete elements, as well as for steel and wooden formwork in construction.
CERAMOL Q	835,8	4,3 **	100	5,4		ISO 6743 B	· spray · brush · roller	Oil used in the production of stoneware, semi-porcelain, and electrotechnical porcelain products.
CERAMOL B	839,2	11,3 **	75 ***	5,2		ISO 6743 B	· spray · brush · roller	Release oil used in the ceramics industry in the production of stoneware, semi-porcelain, and electrotechnical porcelain products as a component of the ceramic mass. The product is used to improve demoulding of the manufactured products, to prevent adhesion of the mass to the moulds, and to protect the moulds against corrosion.
OLEJ DO WYROBÓW CERAMICZNYCH BQ	835,2	4,3 **	100 ***	6,2		ISO 6743 B	· spray · brush · roller	Release oil used in the production of ceramic products. The product is used in the production of stoneware, semi-porcelain, and electro-technical porcelain products as a component of the kaolin mass.
OLEJ SEPARACYJNY	881,9	30,3	202	-		-	· spray · brush	Separation oil intended for the preparation of water-oil emulsions used to eliminate the adhesion of asphalt mass to the metal surfaces of asphalt transport vehicles, paving machines, and rollers.
OLEJ DO FIOLEK A VG-32	873,5	30,5	215	-		-	· spray · brush · roller	Vial forming oil is produced on the basis of deeply refined mineral oil with the addition of performance and dispersant-detergent additives. The product can be used in the hot forming process of plastic glass mass.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order
** Kinematic viscosity at 20°C [mm²/s]
*** Flash point
**** Former name: KONKRETON BIO-BIT

Product name	Kinematic viscosity of the concentrate at 40°C [mm²/s]	Appearance of the emulsion at 20°C	pH of 5% emulsion	Corrosion protection on steel plates – Herbert method	Emulsion stability over 24h/20±50°C	Refractometric factor at 20°C	Water hardness [°n]	Machined material	Recommended working concentrations	Product description
UNICOOL MIKRO EP	65,0	Clear to opalescent emulsion	9,2	H0	passes	1,4	10 °n to 20 °n	- steel - cast iron - non-ferrous metals - very hard materials, e.g. alloy steels	- heavy grinding: 3–5% - heavy machining (turning, milling): 3–5% - very heavy machining (reaming, threading): 5–8%	Semi-synthetic emulsifying concentrate (microemulsion) with EP additives, used for heavy-duty metal cutting operations and grinding of steel, cast iron, non-ferrous metals, or when machining very hard materials such as alloy steels, Nimonic alloys.
UNICOOL MIKRO E	1,0	Clear to opalescent emulsion	9,4	H0	passes	2,5	10 °n to 20 °n	- cast iron - iron alloys and stainless steel - aluminium alloys - plastic materials		Semi-synthetic emulsifying concentrate (microemulsion), used for typical machining processes: turning, milling, drilling, reaming, threading, forming, grinding. Suitable for both low- and high-pressure CNC systems. It can be used in central systems as well as in individual machines.
UNICOOL MIKRO 40 P	15,8	Clear to opalescent emulsion	9,4	H0	passes	2,3	10 °n to 15°n	- cast iron - iron alloys and stainless steel - aluminium alloys - plastic materials	- normal machining (turning, milling): light (3%), medium-heavy (5–6%) - grinding: light (1.5–2%), medium-heavy (3–5%) - stamping, forming: light (3–4%), medium-heavy (5–6%) - reaming: light (4–5%), medium-heavy (8–10%)	Semi-synthetic emulsifying concentrate (microemulsion), used for typical machining processes: turning, milling, forming, grinding. Suitable for both low- and high-pressure CNC systems. It can be used in central systems as well as in individual machines.
UNICOOL MIKRO 40 PS	5,6	Clear to opalescent emulsion	9,4	H0	passes	1,9	10 °n to 15°n	- iron alloys and stainless steel - cast iron - copper and aluminium alloys - plastic materials		Semi-synthetic emulsifying concentrate (microemulsion), used for typical machining processes: turning, milling, drilling, reaming, deep hole drilling, threading, forming, grinding. Provides very good corrosion protection for components made of steel and non-ferrous metals. Suitable for both low- and high-pressure CNC systems. It can be used in central systems as well as in individual machines.
UNICOOL MIKRO 40 PW	15,8	Clear to opalescent emulsion	9,4	H0	passes	2,3	10 °n to 15°n	- cast iron - iron alloys and stainless steel - aluminium alloys - plastic materials	- normal machining (turning, milling): light machining (3%), medium (5–6%), heavy (7–8%) - grinding: light machining (1.5–2%), medium (3–5%), heavy (3–5%) - heavy machining (threading, deep hole drilling): light machining (3–4%), medium (6–8%), heavy (9%) - stamping, forming: light machining (3–4%), medium (5–6%), heavy (6–8%) - reaming: light machining (4–5%), medium (8–10%), heavy (10–12%)	Semi-synthetic emulsifying concentrate (microemulsion) with enhanced lubricating properties, used for typical machining processes: turning, milling, drilling, reaming, deep hole drilling, threading, forming, grinding. Suitable for both low- and high-pressure CNC systems. It can be used in central systems as well as in individual machines.
UNICOOL AL.	54,0	Semi-transparent to milky emulsion	9,0	H0	passes	1,1	< 10 °n	- aluminium - copper and aluminium alloys - steel alloys	- grinding: (3-5%) - rough turning: (3-5%) - finish turning, finish reaming, threading: (5–8%) - extrusion: (8–20%)	Semi-synthetic emulsifying concentrate (microemulsion) for universal use in metal machining operations. Suitable for both low- and high-pressure CNC systems. It can be used in central systems as well as in individual machines.
UNICOOL WO	29,0	Milky emulsion	9,2	H0	passes	1,5	10 °n to 15 °n	- steel - cast iron - non-ferrous metals and their alloys	For water with general hardness up to 15°n: - grinding: (3–4%) - normal machining (e.g. turning, milling): (4–8%) - heavy machining (e.g. threading): (8–10%, up to 15% for very heavy-duty operations)	Cooling and lubricating mineral emulsifying concentrate (milky emulsion) used for various types of machining operations.
UNICOOL WO PRO	68,0	Milky emulsion	9,6	H0	passes	1,0	10 °n to 25 °n	- steel - cast iron - non-ferrous metals and their alloys - copper and aluminium alloys	For water with general hardness up to 15°n: - turning, milling: (5–8%) - grinding: (3-5%) - threading: (10–12%) - plastic forming: (5–12%)	Cooling and lubricating mineral emulsifying concentrate (milky emulsion) used for various types of metal and alloy machining operations, for heavy-duty operations requiring enhanced lubricating properties.
UNICOOL WO PRO MW	69,0	Milky emulsion	9,7	H0	passes	1,0		- steel - cast iron - aluminium alloys - non-ferrous metals and their alloys - copper alloys		Cooling and lubricating mineral emulsifying concentrate (milky emulsion) used for various types of metal and alloy machining operations, particularly aluminium alloys, in heavy-duty operations requiring enhanced lubricating properties.
EMULGOL DS 30	28,5	Milky emulsion	9,2	H0	passes	1,5	10 °n to 15 °n	- steel - cast iron - non-ferrous metals and their alloys - copper and aluminium alloys	For water with general hardness up to 15°n: - grinding: (3-5%) - turning, milling, drilling, reaming: (5–10%) - threading: (10–15%)	Cooling and lubricating mineral emulsifying concentrate (milky emulsion) used for various types of machining operations.
EMULGOL ES-12	30,5	Milky emulsion	9,1	H0	passes	1,4		- steel - cast iron - non-ferrous metals and their alloys - copper and aluminium alloys		Cooling and lubricating mineral emulsifying concentrate (milky emulsion) used for various types of machining operations.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl



Product name	Density at 15°C [g/cm³]	Kinematic viscosity at 40°C [mm²/s]	Pour point °C	Flash point °C	Weld load [kg]	Machining processes	Product description
ACP-1E	0,86	16,7	-3	148	-	· profile turning of steel, cast iron, and copper and aluminium alloys · gear cutting by slotting · reaming with multi-blade reamers · thread cutting	Cutting oils for machining steel, cast iron, copper, and aluminium alloys under high unit pressures and high cutting speeds. ACP series E cutting oils are chlorine-free, non-emulsifying metalworking oils enriched with lubricity additives for a wide range of applications.
ACP-2E	0,87	21,3	-15	153	-	· peripheral milling · steel reaming with multi-blade reamer · thread cutting · rolling · shaving · broaching and push broaching	
ACP-3E	0,87	26,5	-9	159	-	· deep hole drilling · automatic machining	
ACP-1L	0,86	26,0	-24	225	-	· profile turning of steel, cast iron, and copper alloys · gear cutting by slotting · reaming with multi-blade reamers · thread cutting	Cutting oils for machining steel, cast iron, copper, and aluminium alloys under high unit pressures and high cutting speeds. ACP series L cutting oils are chlorine-free, non-emulsifying metalworking oils enriched with vegetable-based and polar lubricity additives.
ACP-2L	0,87	33,0	-21	230	-	· peripheral milling · steel reaming with multi-blade reamer · thread cutting · rolling · shaving · broaching and push broaching	
FREZOL HC 800	0,90	22,8	-21	172	620	· milling (e.g. gears) · turning · threading · reaming · shaving · slotting and broaching	Next-generation metalworking oils for use in heavy-duty metalworking operations where a non-emulsifying oil with very high lubricating film strength and excellent anti-wear properties is required.
FREZOL HC 2200 *	-	25,0	-	-	700		
FREZOL WS 8	0,88	8,0	-	125	-	· honing · grinding · lapping	Oil for machining steel, non-ferrous metals, and carbides during heavy and medium-heavy metalworking operations. The oil is designed for processes where rapid heat dissipation from the cutting zone is required while maintaining appropriate lubricating film strength.
FREZOL WRA 32	0,86	28,0	-21	220	-	· turning · cutting · milling · upsetting · stamping	High-quality oil for machining and plastic working of ferrous and non-ferrous alloys, particularly for demanding plastic forming operations on aluminium alloys. The oil contains thermally and oxidatively stabilised synthetic lubricity and anti-wear additives.
FREZOL EPX 22 *	0,89	23,0	-15	170	450	· turning · broaching · milling · slotting · threading · reaming · cutting	Cutting oils for machining difficult-to-machine steels, stainless steels, and acid-resistant steels, where the use of a non-emulsifying oil with high lubricating film strength is required.
FREZOL EPX 32	0,89	31,5	-12	230	500		
FREZOL EPX 46 *	0,89	44,5	-12	240	500		
FREZOL EP 5	0,87	5,2	-	120	-	· grinding · profile grinding	Oil for metalworking in high-speed grinding and profile grinding operations on heat-treated alloy steel components.
FREZOL EP 32 *	0,89	33,2	-	205	-	· turning · broaching · milling · slotting	Metalworking oil for processes requiring a non-emulsifying oil with high lubricating film strength. Recommended for machining difficult-to-machine steels such as stainless and acid-resistant steels.
FREZOL 22	0,87	22,0	-	-	200	· milling (e.g. gears) · turning · threading	Metalworking oils for light and medium-duty machining operations on copper and its alloys, as well as ferrous and non-ferrous metals.
FREZOL 32	0,88	30,0	-	-	200		
FREZOL C 3280	0,90	55,0	-	-	>800	-	Non-emulsifying concentrate for heavy-duty metal cutting operations, designed as an EP booster in an amount of at least 10% to the oil used in the system. Ensures improved EP properties of the system, which in turn facilitates the machining of difficult-to-machine components.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order



Product name	Density at 15°C [g/cm³]	Kinematic viscosity at 40°C [mm²/s]	Pour point °C	Flash point °C	Weld load [kg]	Machining processes	Product description
FREZOL CUT 3	0,84	4,5	-66	134 **	-	· grinding · metal honing	Metalworking oil for specific finishing operations on ferrous metals, as well as for machining of steel and aluminium alloys.
FREZOL CUT 25	0,88	22,8	-	180	620		Metalworking oil for cutting operations used in high-performance grinding processes and in machining with tools of precisely defined geometry at low and medium cutting speeds. Suitable for machining steel and non-ferrous metals. The product is not intended for machining copper and its alloys.
FREZOL CUT 25 A *	0,88	23,0	-12	198	-	· grinding · turning · milling · drilling · threading	Metalworking oil for cutting operations used in high-performance grinding processes and in machining with tools of precisely defined geometry at low and medium cutting speeds. The product is not intended for machining copper and its alloys.
FREZOL CUT 32	0,88	34,4	-12	224	-		Metalworking oil with wide-ranging applications, suitable both for operations with tools of precisely defined geometry and for grinding. Suitable for machining steel, non-ferrous metals and yellow metals. May be used as a multifunctional circulating oil.
FREZOL CUT 32 A	0,88	32,0	-12	224	-		Metalworking oil with wide-ranging applications, suitable both for operations with tools of precisely defined geometry and for grinding. Suitable for machining steel and non-ferrous metals. The product is not intended for machining copper and its alloys. May be used as a multifunctional circulating oil.
FREZOL CUT OC *	0,88	15,8	-12	185	-	· turning · milling · drilling (including deep hole drilling) · internal threading and external grinding	Metalworking oil for processes involving tools with precisely defined cutting-edge geometry. Recommended even for machining materials with very poor machinability.
FREZOL CUT OC MULTI	0,88	16,0	-12	180	800	· turning · milling · drilling · reaming	Metal cutting oil designed primarily for NC and CNC machining centres and for machining non-ferrous metals and their alloys. Provides excellent cutting and cooling performance.
FREZOL CUT EC AL	0,87	12,5	-57	176	-	· milling · turning · internal and external threading · drilling (including deep hole drilling)	Metalworking oils for processes with precisely defined tool cutting-edge geometry. Recommended even for machining materials with very poor machinability and for complex machining operations performed during gear manufacturing. Not suitable for machining non-ferrous metals.
FREZOL UNICUT 22 *	0,88	24,8	-15	200	-	· drilling · turning · threading · milling · slotting	Metal cutting oil with the addition of a depressant and sulphurised mineral oils, used for machining steel and cast iron at high cutting speeds and elevated cutting-edge temperatures, as well as for machining high-strength steels and heat-resistant steels. Not recommended for machining non-ferrous metals or in applications where a high surface finish quality of the machined material is required. Active sulphur content: 0.40% (m/m).
FREZOL UNICUT 32 *	0,89	36,7	-12	202	-		Metal cutting oil with the addition of sulphurised mineral oils, used for machining steel and cast iron at high cutting speeds and elevated cutting-edge temperatures, as well as for machining high-strength steels and heat-resistant steels. Not recommended for machining non-ferrous metals, especially copper and its alloys.
SULFOFREZOL 22	0,87	22,0	-16	162	-	· machining · broaching · threading	Compounded metal cutting oil for machining ferrous alloys and non-ferrous metals at low cutting speeds and cutting-edge temperatures up to 120°C.
SULFOFREZOL 36	0,87	36,0	-15	215	-	· drilling · turning · threading	Multifunctional cutting and circulating oil designed for lubrication and cooling of tools during steel cutting operations. Performs the functions of a circulating oil, and its innovative technology also allows safe use in the hydraulic and gear systems of machining equipment.
METALWORKING OIL SM	0,87	23,3	-6	180	-	· honing · lapping · grinding	Metalworking oil for honing, lapping, grinding, final surface finishing of ferrous and light metals, as well as for machining of ferrous and non-ferrous alloys.
MILTRON AM 46	0,88	43,5	-18	220	250		
LAPENOMIL LLE	0,84	8,0	-	170	-		

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order

** Flash point (temperature)

Product name	Density at 15°C [g/cm³]	Kinematic viscosity at 40°C [mm²/s]	Flash point, COC [°C]	Lubricating properties - weld load [kG]	Product description
PRESSOL PT 1	0,78	1,2	52	-	Evaporation liquid intended for pressing varnished steel sheets in the production of roofing. The surface of the sheet metal after treatment does not require degreasing or other cleaning operations. The product can be applied to the sheet metal surface with a brush, roller or by spraying.
PRESSOL PT 2	0,81	1,4	80	-	A colourless, low-viscosity liquid with rapid evaporation properties, designed for use in various types of metal forming operations, such as stamping, profiling and precision blanking of complex-geometry components from steel sheets on hydraulic presses. The recommended method of application is to spray the product onto the surface.
PRESSOL M	0,80	1,4	64	-	Evaporating liquid for stamping, punching, profiling and perforating aluminium and steel sheets. Does not colour the treated surfaces. The product can be applied to the sheet metal surface with a brush, roller or by spraying.
PRESSOL WK *	0,90	86,0	214	800	Lubricating and cooling oil for plastic forming, recommended for precision extrusion and rolling processes. The product contains refining additives which provide increased strength of the lubricating film, improved anticorrosion properties and facilitate the process of washing workpieces after machining.
PRESSOL ST	-	205,0	-	800	Oil for extrusion and hollowing in the cold forming process using all types of stamping presses. Recommended for all types of materials, including aluminium and copper.
DEEP-DRAWING OIL	0,91	330,0	240	620	Forming oil used for the drawing of components with complex geometries and sharp curvatures, requiring very high pressures, e.g. in the drawing of bathtubs, sinks made from cold-rolled steel sheet, high-alloy and stainless steel.
OP-35 PLASTIC FORMING OIL	0,90	84,0	222	500	Plastic forming oil for use as a cooling lubricant in the cold forging process. Product based on sulphurised mineral oil and additives with antioxidant and anticorrosive properties.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order

Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 20°C [mm²/s]	Kinematic viscosity at 40°C [mm²/s]	Pour point [°C]	Flash point [°C]	Protective properties	Product description
AKORINOL ŁT	826,0	4,5	-	-	75	Corrosion test on steel plates (96h, 50°C) – resistant	Oil for cleaning metal products, including rolling bearing components, and for inter-operational anti-corrosion protection.
AKORINOL L-5Q	835,5	5,2	3,2	-15	92 ***	-	Oil recommended for cleaning metal products and inter-operational corrosion protection. In addition, the product washes off and dissolves grease soiling.
ANTYKOL 101 *	872,1	-	10,8	-	174	Corrosion with inorganic salt exposure – after 24 h – resistant	Maintenance oil recommended for temporary protection against atmospheric corrosion of components made of ferrous and non-ferrous metals. The product can be used for the maintenance and lubrication of weapons, machinery, precision mechanisms and spare parts. As it is compatible with fuel fractions and forms a thin oil film, it can serve as a preservative for engines and injection pumps.
ANTYKOL 40	887,0	-	38,6	-38	206	Corrosion with inorganic salt exposure – after 12 h – resistant	An anti-rust oil recommended for the temporary protection of ferrous metal components against corrosion. This product can be used for the maintenance and lubrication of unprotected machine parts, gearboxes, weapons, spare parts and semi-finished products in the manufacturing process.
ANTYKOL M *	881,0	-	88,0	-25	266	Corrosion with inorganic salt exposure – after 12 h – resistant	Protective oil M is intended for temporary protection of metal surfaces and steel elements of gears, hydraulic and precision devices, etc., except for combustion engines and roller bearings. The oil is not recommended as an anti-corrosion agent for sea transport.
ANTYKOL 100 S	891,7	-	105,9	-26	204	Corrosion with inorganic salt exposure – after 24 h – resistant	Maintenance oil for corrosion protection of internal surfaces of combustion engines, air compressors and engine pumps.
ANTYKOL ŁT *	881,0	-	116,0	-24	270 ***	Corrosion with inorganic salt exposure – after 12 h – resistant	Oil for long-term corrosion protection. Not recommended for components transported by sea.
ANTYKOL TS-120	900,7	120,0 **	211,8	-	220	-	Protective oil for self-lubricating sintered powder bushings and plain bearing running surfaces.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

*Product available periodically on special order

** Kinematic viscosity at 50°C [mm²/s]

*** Flash point (temperature)



Product name	Kinematic viscosity at 40°C [mm²/s]	Flash point (COC) min. [°C]	Flash point min. [°C]	Pour point [°C]	Cooling rate [C/s]	Incineration residue [%]	Acid number [mg KOH/g]	Recommended oil bath temperatures	Product description
HARTEX 70	22,0	180	160	-15	96	-	0,1	40-80°C	Low-temperature quenching oil for the heat treatment of cast iron, alloy steel and carburised steel elements, especially in closed furnaces with a controlled atmosphere, where a high surface cleanliness of the workpieces is required. The product also works well in through-feed lubrication.
HARTEX 70 S	24,0	195	180	-	96	0,20	-		Low-temperature quenching oil for the heat treatment of cast iron and steel elements, especially in closed furnaces with a controlled atmosphere, where a high surface cleanliness of the workpieces is required.
HARTEX 90S	23,8	206	185	-18	86	0,28	-		
HARTEX 120	45,0	220	200	-12	89	-	-	110-130°C	Medium-temperature quenching oil for the heat treatment of cast iron and steel elements, especially in closed furnaces with controlled atmosphere, where a high surface cleanliness of the workpieces is required.
HARTEX WZ	31,5 **	145	-	-	-	0,20	0,05	40-80°C	Low-temperature quenching oil for the heat treatment of cast iron and steel elements, especially in closed furnaces with controlled atmosphere, where a high surface cleanliness of the workpieces is required.
OH-70 M	22,1	160	140	-5	-	0,20	-	40-80°C	Low-temperature quenching oil for the heat treatment of cast iron and steel elements, for which small geometrical deformations are permissible at the required cooling rate.
OH-120 M	44,5	200	180	-5	-	0,60	-	110-130°C	Medium-temperature quenching oil for the heat treatment of cast iron and steel elements, for which small geometrical deformations are permissible at the required cooling rate.
OH-150 M	66,0	215	-	-6	-	-	-	130-150°C	
OH-160 M	222,1	250	230	-3	-	0,90	-	160-180°C	High-temperature quenching oil for the heat treatment of cast iron and steel elements, for which small geometrical deformations are permissible at the required cooling rate.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

** Kinematic viscosity at 20°C



Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Kinematic viscosity at 100°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point [°C]	Coking residue [% (m/m)]	Product description
ITERM SYNT 3P	1025,8 ***	15,0	2,8	-	-34 **	194	-	Synthetic heat transfer fluid for use in closed-loop heating systems with temperatures from -20 °C to 350 °C, occasionally up to 375 °C.
ITERM-4 *	837,9	4,1	1,5	-	-28	135	-	Heat transfer oil for industrial cooling and heating systems, heaters and oil systems used for heating and closed-loop heating devices.
ITERM 4 HT	851,1	19,6	4,1	107	-15	206	0,01	High-performance heat transfer oil for closed heating systems in the temperature range from -15°C to 285°C, for industrial cooling and heating systems, heaters and oil systems for heating.
ITERM 5	866,7	30,2	5,2	100	-15	226	0,01	High-tech heat transfer medium for closed and open oil-fired heating systems, closed industrial systems, cooling and heating systems where the operating temperature reaches 315°C - 320°C (temperature in the oil mass) and for solid fuel-fired furnaces where additional heat extraction systems are available.
ITERM 6 MB	877,7	40,1	5,9	94	-18	236	0,24	Heat transfer medium for closed heating systems in the temperature range from -10°C to 285°C, for industrial cooling and heating systems, heaters and oil systems for heating and for solid fuel-fired furnaces where additional heat extraction systems are available.
ITERM G 35	877,0	-	6,0	-	-18	230	0,40	Oil used as a heat carrier, recommended for closed, pressure-free heating systems with oil circulation in the liquid phase at maximum volume temperatures of up to 280°C and a maximum stratification temperature of up to 340°C.
ITERM G 100	881,8	102,0	11,4	-	-12	268	-	Oil used as a heat carrier for closed, pressure-free heating systems with oil circulation, at maximum volume temperatures of up to 280°C and a maximum stratification temperature of up to 340°C.
ITERM 30 MF	906,9	640,1	38,3	98	-15	302	0,61	Oil for lubrication of machinery and equipment operating at temperatures of up to 200°C, e.g. conveyor chains in dryers.
ITERM 32	879,3	33,1	5,4	98	-15	215	-	Heating oil recommended for use in closed heating systems, industrial cooling and heating installations, heaters and oil heating systems.
ITERM 100	868,3	20,1	4,4	95	-18	216	0,03	Heating oil for use as a heat carrier in heating devices and installations where the temperature of the oil does not exceed 200°C. It can be used in open systems and in hermetically sealed systems.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order
** Pour point [°C]
*** Density at 20°C [kg/m³]

Saw Oils



Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point (COC) [°C]	Product description
PILAROL OLEA ***	0,84	63,1	200	-26	>230	A product containing vegetable oils, designed for lubricating the cutting mechanism (chain) and guide bars of power saws used in forestry and orchard management.
PILAROL VG 68	0,88	64,9	90	-30	>220	High-quality oil for the lubrication of the cutting systems (chains) and guide bars of chainsaws used in forestry or horticulture.
PILAROL VG 140	0,89	140,0	91	-28	>220	
PILAROL VG 150	0,89	157,4	97	-24		
PILAROL VG 220	0,89	218,7	95	-21		

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

*** Former name: PILAROL BIO

Electrical Insulating Oils



Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Kinematic viscosity at -30°C [mm²/s]	Pour point [°C]	Flash point [°C]	Breakdown voltage [kV]	Antioxidant content	Complies with	Product description
ORLEN OIL TRAFO EN	0,88	10,3	1000	-60	142	66	brak	PN-EN IEC 60296:2021 RIET 2022r. edition.	Non-inhibited electrical insulating oil for insulating and cooling various types of electrical equipment. The product is recommended for heavy-duty use in electrical equipment requiring oil, including the filling of power and distribution transformers, switches, rectifiers and switchgear.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl



Pneumatic Equipment Oils

Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Pour point [°C]	Flash point (COC) [°C]	Lubricating properties - weld load [kG]	Product description
PNEUMATIC VG-32	0,88	31,2	-18	>160	-	Oil for the lubrication of pneumatically driven equipment, e.g. upholstery staplers, drills, assembly spanners, etc., requiring lubrication of internal moving parts.
PNEUMATIC VG 100	0,89	101,0	-30	>220	300	Oil designed for the lubrication of heavy-duty, pneumatic percussive tools such as drills, jackhammers, impact drills, etc.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl



Shock Absorber Oils

Product name	Density at 15°C [kg/m³]	Kinematic viscosity at 40°C [mm²/s]	Kinematic viscosity at -30°C [mm²/s]	Viscosity index	Pour point [°C]	Flash point (COC)	Resistance to foaming: Sequence I Sequence II Sequence III	Product description
AMORTYZOL 15-WL 150	0,87	15,8	460	180	-49	164	70/0 90/0 50/0	Oil for the lubrication of telescopic shock absorbers designed to dampen vibrations in vehicle suspensions, truck loading ramps and vehicle hydraulics.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

Product name	NLGI grade	Thickener type	Base oil	Base oil viscosity at 40°C [mm²/s]	Operating temperature range [°C]	Worked penetration at 25°C [1/10mm]	Dropping point [°C]	Colour	Product description	Additional properties	
BENTONITE GREASES											
BENTOMOS 23	2	bentonite	mineral	215	-10÷200	260-300	> 300	dark grey, with MoS ₂ additive		Grease recommended for the lubrication of rolling and plain bearings, as well as other friction surfaces, with a constant operating temperature above 100°C, primarily within the range of 120–200°C, and with sufficiently frequent replacements or refilling — up to about 220°C.	It is recommended for use under high, particularly shock loads. It is not suitable for lubricating bearings driven by low torque or bearings with small transverse clearance.
BENTOR 2	2	bentonite	mineral	215	-10÷200	260-300	> 300	brown		Grease recommended for the lubrication of rolling and plain bearings, as well as other friction surfaces, with a constant operating temperature from 120°C to 200°C.	The product is moisture-resistant and virtually non-melting. It is not suitable for lubricating bearings driven by low torque or bearings with small transverse clearance.
ALUMINIUM COMPLEX GREASES											
ALITEN EP-1	1	aluminium complex	mineral	140	-20÷120	305-345	> 200	brown		Greases designed for the lubrication of rolling bearings.	Recommended for the lubrication of bearings in equipment with central lubrication systems, operating at low temperatures and requiring grease to be pumped over long distances.
ALITEN EP-2	2	aluminium complex	mineral	140	-20÷120	260-300	> 200	brown			Recommended for the lubrication of bearings in equipment with individual lubrication systems and central lubrication systems, operating at high ambient temperatures and requiring grease to be pumped over short distances.
ALITEN OK ***	-	aluminium	vegetable oil	35	-10÷50	-	-	dark grey		Grease intended primarily for the lubrication of railway wheel flanges and rails.	Recommended for lubricating wheel flanges via central lubrication systems that require grease to be pumped over long distances.
LITHIUM COMPLEX GREASES											
GREASEN SYNTAX HT 2	2	lithium complex	synthetic	48	-50÷180	260-300	260	brown		Grease designed for the lubrication of heavy-duty and high-speed rolling and sliding bearings and other mechanisms.	It has antistatic properties and is compatible with copper alloy components as well as with a large proportion of elastomers, which makes it possible to lubricate metal-plastic and metal-rubber friction centres. It is suitable for mechanisms exposed to shock loads, vibrations, high dust, moisture and water washout.
NEW LITEN PREMIUM ŁT 4 EP1 ZS	1	lithium complex	mineral	270	-25-150	310-340	>240	brown		Multi-purpose, high-temperature greases designed for the lubrication of machine components in demanding industrial applications where water is present. Particularly recommended for friction couples subject to high impact loads and low rotational speeds, such as plain/slide bearings, rolling bearings and guide rails.	They possess excellent anti-corrosion properties, even in the presence of water, and high mechanical stability. They ensure effective lubrication by forming a durable lubricating film resistant to high loads. They are widely compatible with elastomer seals.
NEW LITEN PREMIUM ŁT 4 EP2 ZS	2	lithium complex	mineral	270	-25-150	265-295	>240	brown			
NEW GREASEN HT EP	1,5	lithium complex	mineral	270	-25-150	290-330	260	dark grey	A multi-purpose, all-purpose grease, designed for the lubrication of components operating in harsh conditions, including in the presence of water. Particularly recommended for friction couples subject to extreme impact loads and low rotational speeds, such as plain/slide bearings, rolling bearings, guide rails and pin joints.	It is highly resistant to leaching in both cold and hot water. The grease also offers high resistance to oxidation, which ensures effective protection against corrosion and very good anti-wear and anti-seize properties.	
NEW GREASEN RAIL S-3	3	lithium complex	mineral	100	-30÷140	245-265	>240	brown	A grease designed for use in rail vehicles, intended for the wheel bearings of passenger and freight wagons travelling at a maximum speed of 200 km/h.	It has high mechanical and structural stability. It provides long-lasting protection against corrosion as well as wear and tear. It is compatible with elastomer cages.	
GREASEN COMPLEX 2	2	lithium complex	mineral	100	-40÷160	260-300	260	brown	Greases intended for the lubrication of various friction assemblies such as bearings, gearboxes, constant velocity joints, threaded connections operating under high loads and extreme temperatures. The greases are designed for use in heavy construction and mining equipment.	The composition of the greases provides superior lubricating, anti-corrosion and adhesive properties – enabling operation under extreme load conditions, across a wide temperature range, and in heavily dust-laden environments.	
GREASEN EP-23	2	lithium complex	mineral	140	-30÷140	260-300	220	dark grey, with MoS ₂ additive	Grease intended for the lubrication of heavily loaded friction assemblies and bevel gears in brushcutters. It is also recommended for applications with frequent reversal of movement direction or where low movement speeds are combined with high loads, such as in constant velocity joints.	The product is a lithium complex grease with a molybdenum disulphide (MoS ₂) content of 3%. It is resistant to moisture, steam, as well as weak acids and alkalis. The grease is also resistant to vibration, high pressures, and shock loads.	
LITEN PREMIUM ŁT-4EP1	1	lithium complex	mineral	140	-30÷140	310-340	250	brown	Greases recommended for the lubrication of: rolling and plain bearings (including in centralised lubrication systems), slow-speed and low to medium-loaded gearboxes, joints and slideways of machinery. It can also be successfully used as a multifunctional automotive grease.	The greases exhibit excellent tribological performance and ageing resistance. A modern formulation of performance-enhancing additives also provides a higher dropping point, improved low-temperature properties, and greater resistance to water washout compared to conventional lithium greases.	
LITEN PREMIUM ŁT-4EP2	2	lithium complex	mineral	140	-30÷140	265-295	250	brown			
LITEN PREMIUM ŁT-4EP3	3	lithium complex	mineral	140	-30÷140	220-250	260	brown			
NEW GREASEN G-421	2	lithium complex	semisynthetic	58	-35÷140	265-295	>240	brown	A multi-purpose, high-temperature grease designed for use in severe operating conditions. This product is primarily intended for the lubrication of heavily loaded rolling bearings, vehicle hubs, guide rails, joints and other friction pairs used in land-based engineering.	It has excellent anti-corrosion and lubricating properties, as well as high resistance to oxidation. Thanks to its high adhesion to the substrate, it forms a durable protective layer that effectively reduces friction and wear across a wide range of operating temperatures. It ensures reliable lubrication and corrosion protection even in the presence of water, while its high mechanical stability guarantees long-lasting performance. It also has good sealing properties, effectively protecting friction couples against the ingress of dust, dirt and water.	
SMAROL NANO GREASE FOR LAWNMOWERS	2	lithium complex	mineral	100	-30÷160	260-300	230	dark grey	Grease intended for the lubrication of bevel gears of all types of lawnmowers and trimmers, both petrol and electric. It can also be used successfully around the home, in workshops, and on farms for lubricating and protecting against corrosion of hinges, locks, threads, and components of vehicles and machinery across a wide temperature range.	The product contains a unique NANO formula, comprising a mixture of solid nanostructured lubricating particles. The grease adheres excellently to lubricated surfaces, forming a durable layer that withstands heavy loads, moisture, acids, alkalis, and very high temperatures.	

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

- * Product available periodically on special order
- ** Non-standard penetration range
- *** Former name: ALITEN EKO-OK

EP - Extreme Pressure
AW - Antiwear
MoS₂ - Molybdenum disulphide

Product name	NLGI grade	Thickener type	Base oil	Base oil viscosity at 40°C [mm²/s]	Operating temperature range [°C]	Worked penetration at 25°C [1/10mm]	Dropping point [°C]	Colour	Product description	Additional properties	
LITHIUM GREASES											
GREASEN ŁT-4 S-2	2	lithium	mineral	100	-20÷120	265-295	200	green		Greases intended for the lubrication of automotive rolling bearings, universal joints during assembly, control cables and machine guides, and other equipment components, as well as plain bearings operating within the permissible temperature ranges.	-
GREASEN ŁT-4 S-3	3	lithium	mineral	100	-20÷120	220-250	200	green			
ŁT4 S-2 AUTOMOTIVE GREASE	2	lithium	mineral	100	-20÷120	265-295	>190	green		Greases used for the lubrication of rolling and plain bearings, mainly in agricultural machinery, but also suitable for other machinery requiring bearing grease.	They provide high oxidation resistance, corrosion protection, and enhanced lubricating film durability.
ŁT4 S-3 AUTOMOTIVE GREASE	3	lithium	mineral	100	-20÷130	220-250	>195	green			
LITEN ŁT-4P2 *	2	lithium	mineral	100	-20÷120	260-300	202	brown		Greases designed for the lubrication of sealed rolling bearings operating under demanding conditions requiring properties such as oxidation resistance, corrosion protection, water resistance, and mechanical stability.	These are multifunctional products, enriched with additives providing antioxidant, anti-corrosion, and enhanced lubricating properties.
LITEN ŁT-4P3	3	lithium	mineral	100	-20÷120	220-260	205	brown			
LITEN ŁT-41	1	lithium	mineral	100	-20÷120	310-340	200	brown			
LITEN ŁT-42	2	lithium	mineral	100	-20÷120	265-295	202	brown		Greases intended for the lubrication of rolling and plain bearings.	Formulated with a package of antioxidant, anti-rust, and lubricity-enhancing additives. Selection of grease depends on the method of grease delivery (e.g. centralised or manual lubrication), rotational speed, and operating temperature of the bearing.
LITEN ŁT-43	3	lithium	mineral	100	-20÷120	220-250	205	green			
LITEN EP-0	0	lithium	mineral	140	-20÷120	355-385	190	brown			Grease intended for the lubrication of bearings in equipment with central lubrication systems operating at low temperatures and requiring long-distance grease transfer.
LITEN EP-1	1	lithium	mineral	140	-20÷120	310-340	200	brown		Greases recommended for the lubrication of rolling bearings operating under high loads, as well as for less heavily loaded bearings subjected to shock loads.	Grease intended for the lubrication of bearings in equipment with central lubrication systems operating at moderate ambient temperatures and requiring long-distance grease transfer.
LITEN EP-2	2	lithium	mineral	140	-20÷120	265-295	200	brown			Grease intended for the lubrication of bearings in equipment with individual lubrication systems and central lubrication systems operating at high ambient temperatures and requiring short-distance grease transfer.
LITEN EP-3	3	lithium	mineral	140	-20÷120	220-250	200	brown			Grease intended for the lubrication of bearings in equipment with individual lubrication systems.
LITEN EPX-0	0	lithium	mineral	150	-20÷110	350-390	170	brown			Used at medium temperatures within the specified range and with medium gearbox sealing.
LITEN EPX-00	00	lithium	mineral	150	-20÷110	395-435	160	brown		Greases recommended for the lubrication of enclosed cylindrical and bevel gearboxes.	Also used at lower temperatures within the specified range and with good gearbox sealing.
LITEN LV 2-3	2/3	lithium	mineral	50	-30÷120	240-280	>185	light yellow		Grease intended for use in rolling and plain bearings, as well as small gearboxes operating under medium loads. It is suitable for household equipment such as small rotary machines or electrical devices with lubricated contacts. Designed for long-life bearings that operate without relubrication, such as those in small and medium electric motors, generators, alternators, vacuum cleaner motors, and domestic appliances.	Its good water resistance makes it suitable for lubricating bearings operating in contact with water, such as washing machine bearings or water pump bearings.
LITEN LV 2 EP	2/3	lithium	mineral	50	-30÷120	240-280	>185	light brown		Grease intended primarily for the lubrication of rolling bearings operating under increased pressure and high dynamic loads. It is also suitable for lubricating plain bearings and small gearboxes with low or medium loads.	Good water resistance makes it suitable for use in bearings exposed to water (washing machine bearings, automotive water pumps, etc.).
LITEN LVG 2 *	2/3 **	lithium	mineral	50	-30÷120	240-280	> 180	dark grey, with graphite additive		Grease intended mainly for the lubrication of plain shaft bearings operating under the conditions of high pressure and dynamic stresses. Also suitable for the lubrication of gears, pins, bushings and other mechanisms as well as slow-running rolling bearings.	Not recommended for higher-speed rolling bearings due to its solid lubricant content.
LITEN LVT 2-M *	1/2 **	lithium	mineral	200	-25÷120	270-310	> 180	dark grey, with MoS ₂ additive		Grease intended mainly for the lubrication of plain shaft bearings operating under the conditions of high pressure and dynamic stresses. Also suitable for the lubrication of gears, pins, bushings and other mechanisms as well as slow-running rolling bearings.	Not recommended for higher-speed rolling bearings due to its solid lubricant content (5% MoS2).
SMAROL UNIVERSAL	2	lithium	mineral	100	-20÷120	265-295	202	brown	Multi-purpose lithium grease for the lubrication of hinges, locks, threads, chains, gears, rolling and sliding bearings, vehicle components and industrial and agricultural machinery.	-	

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order

** Non-standard penetration range

Product name	NLGI grade	Thickener type	Base oil	Base oil viscosity at 40°C [mm ² /s]	Operating temperature range [°C]	Worked penetration at 25°C [1/10mm]	Dropping point [°C]	Colour	Product description	Additional properties	
CALCIUM GREASES											
GREASEN STP	1 **	calcium	mineral	40	-20÷60	300-350	95	brown		Intended only for periodical lubrication of vehicle chassis, pins, joints, guides. Not suitable for the lubrication of rolling bearings and water pumps.	The soft consistency of the grease allows easy use of lubricating devices such as pneumatic lubricators. Quite resistant to cold water.
GREASEN GRAFIT	≥ 2 **	calcium	mineral	100	-20÷60	>250	95	dark grey, with graphite additive		Grease for the lubrication of: automotive springs, open gears, worm gearboxes, screw threads exposed to corrosive action, chains and other heavily loaded friction nodes. May be used as a typical assembly grease.	The product is resistant to cold water. Not suitable for the lubrication of any automotive components except springs. Not suitable for rolling bearings and other precision mechanisms.
GREASEN GRAFIT PLUS	2	calcium	mineral	100	-20÷60	260-300	>85	dark grey, with graphite additive		Greases intended for the lubrication of leaf springs, screw threads, chains, open gear drives, worm gears, and other heavily loaded friction points. They may also be used as assembly greases. Not suitable for lubricating rolling bearings or precision mechanisms.	They reduce wear and friction, provide corrosion protection, and are suitable for use both in workshops and for everyday maintenance tasks. Particularly recommended for applications involving high levels of dust, exposure to water, high pressures, and transverse clearances.
GREASEN N 1	1/2	calcium	mineral	15	-30÷50	310-340	90	brown		Calcium grease intended for the lubrication of lightly loaded rolling and plain bearings operating under low pressures, within a limited temperature range, and in high-humidity environments.	Particularly recommended for use in centralised lubrication systems.
GREASEN G 3	3	calcium	mineral	50	-30÷70	215-255	95	dark grey, with graphite additive		Calcium grease specifically designed for slow-speed plain or rolling bearings that may operate in wet environments. It is commonly used for lubricating plain bearings in certain mobile machinery, such as construction equipment and agricultural machines – for example, combines, mowers, etc.	It is particularly well suited for lubricating all plain bearings operating in humid environments or in direct contact with water. The formulation contains graphite.
KALTON EP-1	1	calcium	mineral	42	-20÷60	305-345	95	brown		Grease intended for the lubrication of heavily loaded rolling bearings, particularly under shock load conditions, and also in the presence of water, e.g. metal rolling mills, presses, heavy construction machinery, etc.	Recommended for use in centralised lubrication systems.
KALTON EP-2	2	calcium	mineral	190	-10÷60	260-300	95	brown		Grease intended for the lubrication of heavily loaded rolling bearings, especially under shock load conditions, also exposed to water, e.g. metal rolling mills, presses, heavy construction machines, crushers.	Recommended for applications where bearings are manually lubricated or for lubricating devices located close to a friction node.
MACHINE GREASE 2	2	calcium	mineral	100	-10÷60	260-300	95	brown		Greases recommended for the lubrication of plain bearings and other friction surfaces. These products are not suitable for lubricating rolling bearings.	Machine grease 2 is used for lubrication when the grease must be delivered through long, narrow-diameter lines.
MACHINE GREASE 3	3	calcium	mineral	100	-10÷60	215-255	95	brown			Machine grease 3 is used when higher sealing capability of the bearing is required or when grease is delivered through larger-diameter lines over shorter distances.
CSW-1	1	calcium	mineral	130	-10÷60	290-325	93	brown		Recommended for lubricating rolling bearings in roll stands and auxiliary equipment with central lubrication systems, operating at working temperatures not exceeding 60°C, as well as for other equipment operating under high and shock loads.	CSW-1 is recommended when grease must be delivered through long, narrow-diameter lines or in low ambient temperatures.
CSW-2	2	calcium	mineral	130	-10÷60	250-285	95	brown			CSW-2 is recommended when lubrication lines are shorter and larger in diameter, or when improved sealing properties of the grease are required.
L GREASE FOR MECHANICAL BRAKES (PRG-L)	0/1 **	calcium	mineral	140	-10÷60	280-380	120	brown		Seasonal greases intended for lubricating railway brake mechanism control devices.	Product for summer use.
GREASE FOR MECHANICAL BRAKES (PRG-Z)	00 **	calcium	mineral	140	-20÷60	>380	120	brown			Product for winter use.
PWR GREASE	-	calcium	mineral	100	-	-	-	grey, with zinc dust additive		Grease used for sealing and preventing seizure of threaded connections, primarily in drill pipes. Specifically designed to operate in humid and saline water environments, particularly in the mining industry.	This grease protects components operating in brine and water environments, prevents seizing of threaded connections, adheres very well to surfaces in service, protects against rust and corrosion, resists water washout, and provides good oxidation resistance.
LITHIUM-CALCIUM GREASES											
GREASEN N-EP 00/000	00/000 **	lithium-calcium	mineral	35	-30÷90	400-460	165	brown		Greases intended for lubricating friction assemblies in heavy commercial vehicles and buses via central lubrication systems. They may also be used to lubricate various types of reduction gears lubricated with greases.	The product is approved according to MAN 283 Li-P 00/000.
GREASEN S-EP 00/000	00/000 **	lithium-calcium	synthetic	19	-45÷90	400-460	165	brown			Product based on synthetic oil.
LITEN LC EP-1	1	lithium-calcium	mineral	150	-35÷160	310-340	220	brown	Greases mainly intended for lubricating rolling bearings operating under high loads, specifically when: C/P < 7 for bearings under primarily radial loads, C/P > 15 for bearings under primarily axial loads, as well as in lightly loaded bearings subjected to shock loads.	Designed for lubricating bearings in equipment with central lubrication systems, operating at moderate ambient temperatures and requiring grease to be pumped over long distances.	
LITEN LC EP-2	2 **	lithium-calcium	mineral	150	-30÷160	270-295	245	brown		Designed for lubricating bearings in equipment with individual or central lubrication systems, operating at high ambient temperatures and requiring grease to be pumped over short distances.	

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order
** Non-standard penetration range

Product name	NLGI grade	Thickener type	Base oil	Base oil viscosity at 40°C [mm²/s]	Operating temperature range [°C]	Worked penetration at 25°C [1/10mm]	Dropping point [°C]	Colour	Product description	Additional properties	
SULPHONATE GREASES											
HUTPLEX HV	1/2 **	calcium sulphonate	mineral	420	-30÷180	285-315	> 300	brown		High-temperature sulfonate grease for lubricating machine elements in the mining, metallurgical, heavy and marine industries, especially for friction nodes exposed to high impact loads and low torques operating under high dust, water and brine exposure conditions.	The grease is ideal in coal and copper mines for lubricating bearings, pin connections and other mechanisms of machinery and equipment operating in the designated temperature range. The product is also suitable for tough steelworks applications, for the lubrication of stand roller bearings of rolling mill stands.
HUTPLEX WR-2	2	calcium sulphonate	mineral	180	-25÷180	265-295	> 300	brown		High-temperature sulphonate grease for lubricating machine elements in the metallurgical industry, especially roller bearings of rolling mill stands and other friction nodes exposed to high temperatures.	Thanks to its outstanding thermal stability, the grease regains its original structure upon returning to ambient temperature. Perfectly suited for lubricating machine and equipment elements in coal and copper mining, cement plants, steel and heavy industry, as well as in all friction nodes exposed to extreme pressures and water.
SPECIAL GREASES											
SMAROL PTFE	spray grease	PTFE	-	-	-30÷250	-	-	white		Intended for the lubrication of machine parts exposed to high temperatures or significant impacts of water. After application and drying, it leaves a protective layer in the form of an oil film on the lubricated elements, which provides very good protection against oxidation, thus increasing resistance to ageing. It is resistant to water, steam and aggressive media (most acids and alkalis).	In addition to individual applications, it can be used in industry to lubricate the following elements: plain and articulated bearings, chains – also equipped with O-Ring or X-Ring seals, sprockets, chain wheels, levers, sliding guides, linear guide systems, spindles, hinges, steel ropes, ball joints, conveyors in ovens and dryers.
LR GREASE FOR STEEL ROPES	4	special	mineral	420	-	-	> 55	brown		Grease for the maintenance of steel ropes of various types during their manufacture.	Not suitable for the lubrication of drum hoist shaft ropes or ropes for Koepe hoisting systems.
ORLEN OIL KORON L *	-	paraffin	mineral	-	-	-	> 48	dark brown/ dark green		Designed for temporary corrosion protection of metal products during storage and transport, especially for protection in mild climates.	Applied warm, in a liquid form.
NEW GREASEN CORE	1/2	-	mineral	420	-40÷150	285-315	>300	brown		Protective plastic grease for overhead power lines made of steel wires, aluminium, aluminium alloys and for various configurations of their connections.	The grease meets the requirements of the PN-EN 50326:2003 standard for type A greases without the need for heating.
NEW GREASEN RAIL WE	00/000	special	ester	27	-30÷100	430-460***	>300	brown		A biodegradable grease (biodegradability above 60% according to the OECD 301 test) designed for lubricating the wheel flanges of rail vehicles. The product complies with the European railway standard PN-EN 15427-2-1.	It provides excellent adhesion to surfaces and resistance to water. By minimising friction between the wheel flanges and the rail, it effectively reduces noise on curves as well as wear and tear.
NEW GREASEN RAIL W 0/00	0/00	special	ester	27	-30÷100	386-416	>300	silver-gray		A biodegradable grease (biodegradability above 60% according to the OECD 301 test) designed for the year-round lubrication of railway turnouts.	The high adhesion of the grease to the metal surfaces of railway turnouts ensures excellent and long-lasting protection against corrosion. It effectively reduces the friction at railway switches, ensuring excellent rheological properties at low temperatures.
NEW LUBRAIL G	00/000	special	mineral	-	-20-100	400-430***	-	black	A lubricant designed specifically for enclosed gearboxes in electric and diesel locomotive engines.	It is capable of withstanding high mechanical loads. It is characterised by excellent anti-wear properties during frictional wear in the gearbox, thanks to its high degree of adhesion to the gear teeth.	
HYDROCARBON GREASES											
CORROSION PROTECTION GREASE	-	hydrocarbon	mineral	100	do 50	-	>60	brown	Grease for the maintenance of armament equipment. Very good adhesion to the substrate and protection against corrosion and oxidation.	Effective protection against corrosion thanks to a durable protective layer created as a result of high adhesion of the grease to the substrate.	

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

* Product available periodically on special order
** Non-standard penetration range
*** Penetration without compression.

Table 1 Classification of greases by consistency grade according to NLGI			
Grease consistency grade	Consistency	Penetration range according to NLGI	Primary application
000	very fluid	445-475	Mechanical gearboxes
00	fluid	400-430	
0	semi-fluid	335-385	
1	very soft	310-340	Rolling and plain bearings
2	soft	265-295	
3	medium	220-250	
4	firm	175-205	Special mechanisms
5	very firm	130-160	
6	extremely firm	85-115	

Table 2 Types of greases and their characteristics	
Grease type depending on the thickener	Distinguishing features
Lithium greases	· universal applications · good water resistance · long-lasting
Calcium greases	· poor resistance to high operating temperatures · poor adhesion · very good water resistance
Aluminium complex greases	· very good temperature resistance · very good water resistance · good adhesion
Bentonite greases	· very good resistance to high temperatures · no miscibility with other greases · Very good pumpability
Sulphonate greases	· excellent water resistance · excellent load-carrying capacity · very good temperature resistance
Lithium complex greases	· very good temperature resistance · very high durability and mechanical stability

Other

Product name	Density at 15°C [kg/m³]	Sulphur content [ppm]	Benzene content [ppm]	Content of other aromas [ppm]	Product description
EXTRACTION NAPHTHA III N.A.	732.2	0	0	5	Product with low aroma content, trace benzene and sulphur content. Obtained by distillation of hydrocarbon fractions. Characterised by a mild scent and excellent cleaning properties.
Product name	Density at 15°C [kg/m³]	Sulphur content [ppm]	Kinematic viscosity at 40°C [mm²/s]	Corrosive effect on steel shank (24h)	Product description
KALIBROL LUX	779.8	30	2.62	corrosion-resistant	Oil obtained from highly refined petroleum distillates and anti-corrosion additives. The product is used for checking, adjusting, washing and maintaining the fuel apparatus of compression-ignition engines. It can also be used to protect metal parts of fuel apparatus stored in accordance with the instructions for use.

If you have any application concerns, please contact the Oil Service Team. For contact details, see page 25 of the catalogue; e-mail: serwis@orlenoil.pl

A		
1.	ACP-1E	38
2.	ACP-1L	38
3.	ACP-2E	38
4.	ACP-2L	38
5.	ACP-3E	38
6.	AEROMIL SYNTHETIC CLP 320	16
7.	AEROMIL SYNTHETIC PAO 320	16
8.	AKORINOL L-5Q	43
9.	AKORINOL ŁT	43
10.	ALITEN EP-1	48
11.	ALITEN EP-2	48
12.	ALITEN OK	48
13.	AMORTYZOL 15-WL 150	47
14.	ANTYKOL 100 S	43
15.	ANTYKOL 101	43
16.	ANTYKOL 40	43
17.	ANTYKOL ŁT	43
18.	ANTYKOL M	43
19.	ANTYKOL TS-120	43
B		
20.	BENTOMOS 23	48
21.	BENTOR 2	48
C		
22.	CERAMOL B	34
23.	CERAMOL Q	34
24.	COMPOUNDED MACHINE OIL MN-11	30
25.	COMPOUNDED MACHINE OIL MN-15	30
26.	CORALIA HC 100	21
27.	CORALIA HC 150	21
28.	CORALIA K-20	21
29.	CORALIA L-DAA 100	20
30.	CORALIA L-DAA 150	20
31.	CORALIA L-DAA 220	20
32.	CORALIA L-DAA 46	20
33.	CORALIA L-DAA 68	20
34.	CORALIA L-DAB 100	20
35.	CORALIA L-DAB 150	20
36.	CORALIA L-DAB 32	20
37.	CORALIA L-DAB 320	20
38.	CORALIA L-DAB 46	20
39.	CORALIA L-DAB 460	20
40.	CORALIA L-DAB 68	20
41.	CORALIA PAG 85	20
42.	CORALIA PE 32	20
43.	CORALIA PE 46	20
44.	CORALIA PE 68	20
45.	CORALIA ST 32	20
46.	CORALIA ST 46	20
47.	CORALIA ST 68	20
48.	CORALIA T 46	20
49.	CORALIA VACUUM 100	21
50.	CORALIA VDL 100	20
51.	CORALIA VDL 32	20
52.	CORALIA VDL 46	20
53.	CORALIA VDL 68	20
54.	CORROSION PROTECTION GREASE	54
55.	CSW-1	52
56.	CSW-2	52
57.	CYLINDER OIL B 28	30
58.	CYLINDER OIL CL-1500	30
59.	CYLINDER OIL CL-17 (PN-240)	30

60.	CYLINDER OIL CL-30 (PP-280)	30
61.	CYLINDER OIL CL-40 (PW-300)	30
62.	CYLINDER OIL P 28	30
63.	CYLITEN 460 N	21
D		
64.	DEEP-DRAWING OIL	42
65.	DELGAS EXTRA 10W-40	24
66.	DELGAS L 10W-40	24
67.	DELGAS L 30	24
68.	DELGAS L 40	24
69.	DELGAS LA 40	24
70.	DELGAS M 40	24
71.	DELGAS PREMIUM L 40	24
E		
72.	EMULGOL DS 30	36
73.	EMULGOL ES-12	36
74.	EXTRACTION NAPHTHA III N.A.	56
F		
75.	FORMEX Q	34
76.	FREZOL 22	38
77.	FREZOL 32	38
78.	FREZOL C 3280	38
79.	FREZOL CUT 25	40
80.	FREZOL CUT 25 A	40
81.	FREZOL CUT 3	40
82.	FREZOL CUT 32	40
83.	FREZOL CUT 32 A	40
84.	FREZOL CUT EC AL	40
85.	FREZOL CUT OC	40
86.	FREZOL CUT OC MULTI	40
87.	FREZOL EP 32	38
88.	FREZOL EP 5	38
89.	FREZOL EPX 22	38
90.	FREZOL EPX 32	38
91.	FREZOL EPX 46	38
92.	FREZOL HC 2200	38
93.	FREZOL HC 800	38
94.	FREZOL UNICUT 22	40
95.	FREZOL UNICUT 32	40
96.	FREZOL WRA 32	38
97.	FREZOL WS 8	38
98.	FRIGOL M 68	21
99.	FRIGOL TZ-13	21
100.	FRIGOL TZ-19	21
101.	FRIGOL TZ-28	21
102.	FRIGOL WZ	21
G		
103.	GALKOP 100	15
104.	GALKOP 150	15
105.	GALKOP 46	15
106.	GALKOP 68	15
107.	GDB 150 ZLF PROCESS OIL	32
108.	GDB 160 PROCESS OIL	32
109.	GDB 500 PROCESS OIL	32
110.	GDB 500 ZLF PROCESS OIL	32
111.	GDB 6 PROCESS OIL	32
112.	GDB 900 PROCESS OIL	32
113.	GRAFITOL	32
114.	GREASE FOR MECHANICAL BRAKES (PRG-Z)	52
115.	GREASEN COMPLEX 2	48

116.	GREASEN CORE	54
117.	GREASEN EP-23	48
118.	GREASEN G 3	52
119.	GREASEN G-421	48
120.	GREASEN GRAFIT	52
121.	GREASEN GRAFIT PLUS	52
122.	GREASEN HT EP	48
123.	GREASEN ŁT-4 S-2	50
124.	GREASEN ŁT-4 S-3	50
125.	GREASEN N 1	52
126.	GREASEN N-EP 00/000	52
127.	GREASEN RAIL S-3	48
128.	GREASEN RAIL W 0/00	54
129.	GREASEN RAIL WE	54
130.	GREASEN S-EP 00/000	52
131.	GREASEN STP	52
132.	GREASEN SYNTEx HT 2	48
H		
133.	HARTEX 120	44
134.	HARTEX 70	44
135.	HARTEX 70 S	44
136.	HARTEX 90S	44
137.	HARTEX WZ	44
138.	HUTPLEX WR-2	54
139.	HUTPLEX HV	54
140.	HYDRAFER HFC 46	15
141.	HYDROKOP SEMISYNTETIC	15
142.	HYDROL ARCTIC L-HV 15	8
143.	HYDROL ARCTIC L-HV 32	8
144.	HYDROL BIO HEES EL 46	8
145.	HYDROL BIO HETG EL 46	8
146.	HYDROL EXTRA HLP-D 32	10
147.	HYDROL EXTRA L-HV 32	8
148.	HYDROL EXTRA L-HV 46	8
149.	HYDROL EXTRA L-HV 68	8
150.	HYDROL HEAVY L-HM/HLP 100	10
151.	HYDROL HEAVY L-HM/HLP 15	10
152.	HYDROL HEAVY L-HM/HLP 150	10
153.	HYDROL HEAVY L-HM/HLP 22	10
154.	HYDROL HEAVY L-HM/HLP 32	10
155.	HYDROL HEAVY L-HM/HLP 46	10
156.	HYDROL HEAVY L-HM/HLP 68	10
157.	HYDROL HEAVY L-HV/HVLP 100	8
158.	HYDROL HEAVY L-HV/HVLP 15	8
159.	HYDROL HEAVY L-HV/HVLP 32	8
160.	HYDROL HEAVY L-HV/HVLP 46	8
161.	HYDROL HEAVY L-HV/HVLP 68	8
162.	HYDROL HLP-D 22	10
163.	HYDROL HLP-D 32	10
164.	HYDROL HLP-D 46	10
165.	HYDROL HLP-D 68	10
166.	HYDROL HLPT 46	12
167.	HYDROL HVLP-D 46	12
168.	HYDROL L-HL 100	12
169.	HYDROL L-HL 15	12
170.	HYDROL L-HL 150	12
171.	HYDROL L-HL 22	12
172.	HYDROL L-HL 32	12
173.	HYDROL L-HL 46	12
174.	HYDROL L-HL 68	12
175.	HYDROL L-HM/HLP 10	10

176.	HYDROL L-HM/HLP 100	10
177.	HYDROL L-HM/HLP 15	10
178.	HYDROL L-HM/HLP 150	10
179.	HYDROL L-HM/HLP 22	10
180.	HYDROL L-HM/HLP 32	10
181.	HYDROL L-HM/HLP 46	10
182.	HYDROL L-HM/HLP 68	10
183.	HYDROL L-HV 100	8
184.	HYDROL L-HV 15	8
185.	HYDROL L-HV 22	8
186.	HYDROL L-HV 32	8
187.	HYDROL L-HV 46	8
188.	HYDROL L-HV 68	8
189.	HYDROL L-HV PLUS 32	8
190.	HYDROL L-HV PLUS 46	8
191.	HYDROL L-HV PLUS 68	8
192.	HYDROL POWER L-HV 32	8
193.	HYDROL POWER L-HV 46	8
194.	HYDROL POWER L-HV 68	8
195.	HYDROL PREMIUM HLP-D 15	10
196.	HYDROL PREMIUM HLP-D 32	10
197.	HYDROL PREMIUM HLP-D 46	10
198.	HYDROL PREMIUM HLP-D 68	10
199.	HYDROL PREMIUM HVLP-D 46	12
200.	HYDROL PREMIUM L-HM 150	10
201.	HYDROL PREMIUM L-HM 22	10
202.	HYDROL PREMIUM L-HM 32	10
203.	HYDROL PREMIUM L-HM 46	10
204.	HYDROL PREMIUM L-HM 68	10
205.	HYDROL PREMIUM L-HV 15	8
206.	HYDROL PREMIUM L-HV 22	8
207.	HYDROL PREMIUM L-HV 32	8
208.	HYDROL PREMIUM L-HV 46	8
209.	HYDROL PREMIUM L-HV 68	8
210.	HYDROL SPECIAL 46	12
211.	HYDROL SPECIAL 68	12
212.	HYDROL SYNT PE 46	8
I		
213.	IBIS RDEO 40	26
214.	IBIS RDEO 50	26
215.	IBIS RDEO 60	26
216.	IBIS RDEO 70 HT	26
217.	IBIS RDEO HPD 40	26
218.	IBIS RDEO LA	26
219.	IBIS RDEO STANDARD 40	26
220.	ITERM 100	45
221.	ITERM 30 MF	45
222.	ITERM 32	45
223.	ITERM 4 HT	45
224.	ITERM 5	45
225.	ITERM 6 MB	45
226.	ITERM G 100	45
227.	ITERM G 35	45
228.	ITERM SYNT 3P	45
229.	ITERM-4	45
K		
230.	KALIBROL LUX	56
231.	KALTON EP-1	52
232.	KALTON EP-2	52
233.	KONHYDR T	15
234.	KONKRETON 30	34

235. KONKRETON AZ	34
236. KONKRETON BIT	34
237. KONKRETON L	34
238. KONKRETON L PLUS	34
239. KONKRETON M	34
240. KONKRETON MK S-E	34
241. KONKRETON MK S-L	34
242. KONKRETON N	34
243. KONKRETON P	34
244. KONKRETON S	34
245. KONKRETON SEPAR	34
246. KONKRETON T	34
247. KONKRETON V	34
248. KONKRETON VS	34
249. KONKRETON XS	34
250. KONKRETON XS-10	34
251. KVG 100 OIL	32
252. KVG 1000 OIL	32
253. KVG 150 OIL	32
254. KVG 150 Z OIL	32
255. KVG 220 OIL	32
256. KVG 460 OIL	32
257. KVG 68 OIL	32
L	
258. L GREASE FOR MECHANICAL BRAKES (PRG-L)	52
259. L-AN 10	30
260. L-AN 100	30
261. L-AN 10Z	30
262. L-AN 15	30
263. L-AN 150	30
264. L-AN 15Z	30
265. L-AN 22	30
266. L-AN 22Z	30
267. L-AN 32	30
268. L-AN 320Z	30
269. L-AN 46	30
270. L-AN 46Z	30
271. L-AN 55	30
272. L-AN 68	30
273. L-AN 68Z	30
274. LAPENOMIL LLE	40
275. LITEN EP-0	50
276. LITEN EP-1	50
277. LITEN EP-2	50
278. LITEN EP-3	50
279. LITEN EPX-0	50
280. LITEN EPX-00	50
281. LITEN LC EP-1	52
282. LITEN LC EP-2	52
283. LITEN LV 2 EP	50
284. LITEN LV 2-3	50
285. LITEN LVG 2	50
286. LITEN LVT 2-M	50
287. LITEN ŁT-41	50
288. LITEN ŁT-42	50
289. LITEN ŁT-43	50
290. LITEN ŁT-4P2	50
291. LITEN ŁT-4P3	50
292. LITEN PREMIUM ŁT 4 EP1 ZS	48
293. LITEN PREMIUM ŁT 4 EP2 ZS	48
294. LITEN PREMIUM ŁT-4EP1	48
295. LITEN PREMIUM ŁT-4EP2	48
296. LITEN PREMIUM ŁT-4EP3	48

297. LR GREASE FOR STEEL ROPES	54
298. LUBRAIL G	54
Ł	
299. ŁT4 S-2 AUTOMOTIVE GREASE	50
300. ŁT4 S-3 AUTOMOTIVE GREASE	50
M	
301. MACHINE GREASE 2	52
302. MACHINE GREASE 3	52
303. MARINOL MW 50	27
304. MARINOL RG 10050	27
305. MARINOL RG 1030	27
306. MARINOL RG 1040	27
307. MARINOL RG 1230	27
308. MARINOL RG 1240	27
309. MARINOL RG 14050	27
310. MARINOL RG 1530	27
311. MARINOL RG 1540	27
312. MARINOL RG 2030	27
313. MARINOL RG 2040	27
314. MARINOL RG 2050	27
315. MARINOL RG 2550	27
316. MARINOL RG 3030	27
317. MARINOL RG 3040	27
318. MARINOL RG 330	27
319. MARINOL RG 350	27
320. MARINOL RG 4030	27
321. MARINOL RG 4040	27
322. MARINOL RG 4050	27
323. MARINOL RG 630	27
324. MARINOL RG 640	27
325. MARINOL RG 650	27
326. MARINOL RG 7050	27
327. MARINOL RG 8550	27
328. METALWORKING OIL SM	40
329. MILTRON AM 46	40
O	
330. O.OIL OTHP3 ISO VG 32	12
331. OH-120 M	44
332. OH-150 M	44
333. OH-160 M	44
334. OH-70 M	44
335. OLEJ ANTYADHEZYJNY B-0	34
336. OLEJ DO FIOLEK A VG-32 34	
337. OLEJ DO WYROBÓW CERAMICZNYCH BQ	34
338. OLEJ OKRĘTOWY SC-22	27
339. OLEJ SEPARACYJNY	34
340. OP-35 PLASTIC FORMING OIL	42
341. ORLEN OIL H-515	12
342. ORLEN OIL KORON L	54
343. ORLEN OIL TRAFO EN	46
P	
344. P-600 PROCESS OIL	32
345. P-90 PROCESS OIL	32
346. PILAROL OLEA	46
347. PILAROL VG 140	46
348. PILAROL VG 150	46
349. PILAROL VG 220	46
350. PILAROL VG 68	46
351. PNEUMATIC VG 100	47
352. PNEUMATIC VG-32	47
353. PRESSOL M	42
354. PRESSOL PT 1	42

355. PRESSOL PT 2	42
356. PRESSOL ST	42
357. PRESSOL WK	42
358. PWR GREASE	52
R	
359. REMIZ SUPER TG 32	22
360. REMIZ SUPER TG 46	22
361. REMIZ SUPER TG LR 32	22
362. REMIZ TG 32	22
363. REMIZ TG 46	22
364. REMIZ TU 32	22
365. REMIZ TU 46	22
366. REMIZ TU 68	22
S	
367. SMAROL NANO GREASE FOR LAWNMOWERS	48
368. SMAROL PTFE	54
369. SMAROL UNIVERSAL	50
370. SULFOFREZOL 22	40
371. SULFOFREZOL 36	40
T	
372. TRANSGEAR EXTRA PAG 220	16
373. TRANSGEAR EXTRA PAO 150	16
374. TRANSGEAR EXTRA PAO 220	16
375. TRANSGEAR EXTRA PAO 320	16
376. TRANSGEAR EXTRA PAO 460	16
377. TRANSGEAR PAG 150	16
378. TRANSGEAR PAG 220	16
379. TRANSGEAR PAG 320	16
380. TRANSGEAR PAG 460	16
381. TRANSGEAR PAO 150	16
382. TRANSGEAR PAO 220	16
383. TRANSGEAR PAO 320	16
384. TRANSGEAR PAO 460	16
385. TRANSGEAR PE-150	16
386. TRANSGEAR PE-220	16
387. TRANSGEAR PE-320	16
388. TRANSGEAR PE-460	16
389. TRANSOL 100	18
390. TRANSOL 150	18
391. TRANSOL 220	18
392. TRANSOL 320	18
393. TRANSOL 460	18
394. TRANSOL 68	18
395. TRANSOL 680	18
396. TRANSOL CLP 100	18
397. TRANSOL CLP 150	18
398. TRANSOL CLP 220	18
399. TRANSOL CLP 320	18
400. TRANSOL CLP 460	18
401. TRANSOL CLP 68	18
402. TRANSOL CLP 680	18
403. TRANSOL EXTRA XSP 1000	16
404. TRANSOL EXTRA XSP 150	16
405. TRANSOL EXTRA XSP 220	16
406. TRANSOL EXTRA XSP 320	16
407. TRANSOL EXTRA XSP 460	16
408. TRANSOL GL-1	18
409. TRANSOL SP-100	18
410. TRANSOL SP-1000	18
411. TRANSOL SP-150	18
412. TRANSOL SP-220	18
413. TRANSOL SP-320	18

414. TRANSOL SP-460	18
415. TRANSOL SP-68	18
416. TRANSOL SP-680	18
417. TRANSOL V 32	15
418. TURBINEX POWER TG PREMIUM 32	22
419. TURBINEX POWER TG PREMIUM 46	22
420. TURBINEX T-30	22
421. TURBINEX TG PREMIUM 32	22
422. TURBINEX TG PREMIUM 46	22
423. TURBINOWY T-30	22
U	
424. U AXLE OIL	30
425. UNICOOL AL.	36
426. UNICOOL MIKRO 40 P	36
427. UNICOOL MIKRO 40 PS	36
428. UNICOOL MIKRO 40 PW	36
429. UNICOOL MIKRO E	36
430. UNICOOL MIKRO EP	36
431. UNICOOL WO	36
432. UNICOOL WO PRO	36
433. UNICOOL WO PRO MW	36
V	
434. VASELINE OIL 17	32
435. VELOL 10	28
436. VELOL 15	28
437. VELOL 19	28
438. VELOL 20	28
439. VELOL 50	28
440. VELOL 60	28
441. VELOL 8	28
442. VELOL 9Q	28
443. VELOL M 100	28
444. VELOL M 220	28
445. VELOL M 320	28
446. VELOL M 460	28
447. VELOL P 150	28
448. VELOL P 220	28
449. VELOL RC 100	28
450. VELOL RC 220	28
451. VELOL RC 32	28
452. VELOL RC 320	28
453. VELOL RC 46	28
454. VELOL RC 68	28
455. VELOL SM-30	28



ORLEN
OIL



www.oferta.orlenoil.com



ORLEN
OIL

ORLEN OIL Sp. z o.o.
ul. Elbląska 135, 80-718 Gdańsk
☎ +48 12 665 55 00
✉ centrala@orlenoil.pl
⊕ orlenoil.pl | orlenoil.com
⊕ oferta.orlenoil.com